ECL82 / 6BM8 or PCL82 / 16A8 pentode section strapped as triode

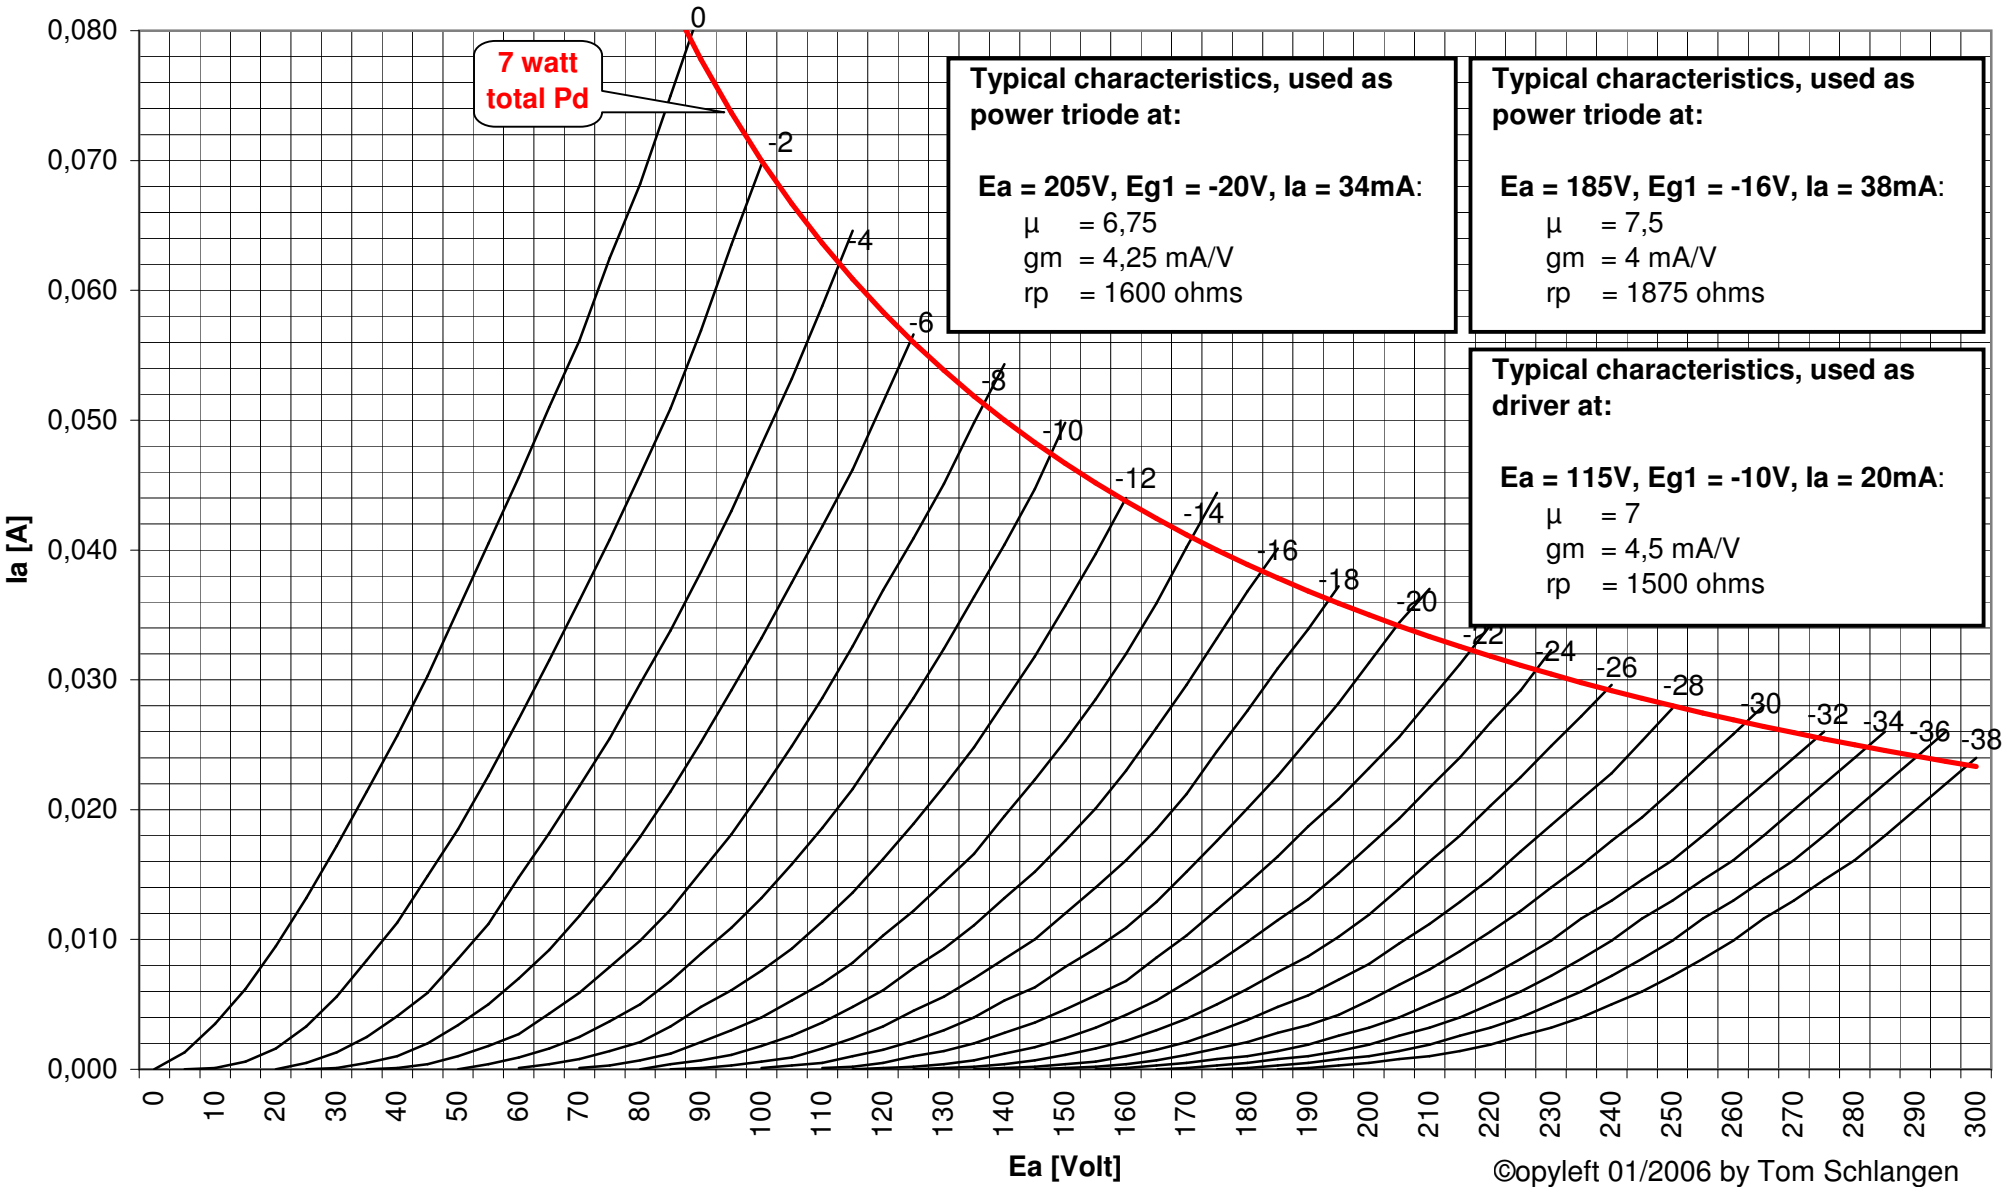

Typical characteristics, used as power triode at:

Ea = 205V, Eg1 = -20V, Ia = 34mA:
μ = 6,75
gm = 4,25 mA/V
rp = 1600 ohms

Typical characteristics, used as power triode at:

Ea = 185V, Eg1 = -16V, Ia = 38mA:
μ = 7,5
gm = 4 mA/V
rp = 1875 ohms

Typical characteristics, used as driver at:

Ea = 115V, Eg1 = -10V, Ia = 20mA:
μ = 7
gm = 4,5 mA/V
rp = 1500 ohms

©opyleft 01/2006 by Tom Schlangen