

# BlueTiSCH: A Multi-PHY Simulation of Low-Power 6TiSCH IoT Networks

Chloe Bae\*, Shiwen Yang\*, Michael Baddeley<sup>†</sup>, Atis Elsts<sup>‡</sup>, and Israat Haque\*

\*Department of Computer Science, Dalhousie University, Halifax, Canada – {chloe.bae;shuwen.yang;israat}@dal.ca

<sup>‡</sup>Institute of Electronics and Computer Science (EDI), Riga, Latvia – atis.elsts@edi.lv

<sup>†</sup>Technology Innovation Institute (TII), Abu Dhabi, UAE – michael.baddeley@tii.ae

**Abstract**—Low-power wireless IoT networks have traditionally operated over a single physical layer (PHY) – many based on the IEEE 802.15.4 standard. However, recent low-power wireless chipsets offer both the IEEE 802.15.4 and all four PHYs of the Bluetooth5 (BT5) standard. This introduces the intriguing possibility that IoT solutions might not necessarily be bound by the limits of a single PHY, and could actively or proactively adapt their PHY depending on RF or networking conditions (e.g., to offer a higher throughput or a longer radio range). Several recent studies have explored such use-cases. However, these studies lack comprehensive evaluation over various metrics (such as reliability, latency, and energy) with regards to scalability and the Radio Frequency (RF) environment. In this work we evaluate the performance of IEEE 802.15.4 and the four BT5 2.4GHz PHY options for the recently completed IETF 6TiSCH low-power wireless standard. To the best of our knowledge, this is the first work to directly compare these PHYs in identical settings. Specifically, we use a recently released 6TiSCH simulator, TSCH-Sim, to compare these PHY options in networks of up to 250 nodes over different RF environments (home, industrial, and outdoor), and highlight from these results how different PHY options might be better suited to particular application use-cases.

**Index Terms**—6TiSCH, IoT, Multi-PHY, BLE, IEEE 802.15.4

## I. INTRODUCTION

Internet of Things (IoT) communications have typically focused on a single low-power wireless standard. Whether IEEE 802.15.4, Bluetooth, or LoRa, the overall aim of these specifications has been to reduce device power consumption while maintaining connectivity and availability requirements for the desired use-case [1, 2]. IEEE 802.15.4, in particular, has served as the underlying physical (PHY) and medium access control (MAC) layer for a number of industrial networking standards, and recently completed efforts from the IETF 6TiSCH Working Group (WG) [3] has introduced IPv6 enabled scheduling and networking mechanisms for the Time Slotted Channel Hopping (TSCH) MAC option introduced as part of the IEEE 802.15.4-2015 amendment.

While TSCH enhances the reliability of IoT wireless network communications by devising communication SlotFrames across time and frequency, 6TiSCH provides mechanisms for efficiently scheduling those communications between nodes. Co-located nodes are able to concurrently transmit on orthogonal channels at each timeslot due to the available channel diversity [3]; thus, improving the capacity of the network over traditional Carrier Sense Multiple Access

(CSMA) approaches. However, the 6TiSCH standard is, in fact, agnostic to the underlying PHY layer though the majority of literature surrounding 6TiSCH has almost exclusively focused on IEEE 802.15.4. With modern low-power wireless chipsets (such as the Nordic nRF52840 [4], and TI CC2650 [5]) supporting multiple PHY standards on a *single radio*, 6TiSCH opens the intriguing possibility of supporting PHYs other than IEEE 802.15.4. Specifically, the nRF52840 supports IEEE 802.15.4, as well as all four BT5 PHY options. This multi PHY support can allow networks to operate over the BT5 125K option for long-range applications. In contrast, applications that require greater throughput over shorter distances can operate over BT5 2M high data-rate PHY.

There have been several recent studies proposing a multi-PHY approach to 6TiSCH IoT networks [6, 7, 8, 9]. These works mostly focused on a limited number of nodes (up to 100), a single environment (indoors or outdoors), or a single scheduler (6TiSCH minimal or Orchestra). Thus, we perform an extensive performance evaluation of five PHYs over: (i) both the 6TiSCH minimal and Orchestra schedulers, (ii) networks of up to 250 nodes, (iii) across three different RF environments (*home, industrial, and outdoor*). Specifically, we implement and evaluate IEEE 802.15.4 and all four BT5 PHYs over 6TiSCH network simulator, TSCH-Sim [10]. Thus, users can choose an appropriate combination of PHY and scheduler for their targeted environment for a better reliability, latency, and energy usage. Furthermore, we make available our simulation code and data to the community for reproducibility and extension<sup>12</sup>. The evaluation results reveal that BLE 500K is the best option for applications that require high PDR and the best replacement for IEEE 802.15.4 if used as a standalone PHY. At the same time, the uncoded BLE 1M and BLE 2M options achieve lower latency and lower energy usage.

This paper is structured as follows. In Section II, we provide an overview of the RPL routing layer (Layer 3), the 6TiSCH minimal and Orchestra Schedulers (Layer 2), and the multiple PHY standards (Layer 1) – explaining how the different aspects of each PHY may impact the higher layers. In Section III, we summarize recent literature examining multi-PHY 6TiSCH approaches. Section IV provides details of our simulation setup following extensive performance results of

<sup>1</sup><https://github.com/mbaddeley/tsch-sim-mply>

<sup>2</sup><https://github.com/dohibae/tsch-project>

each PHY. Finally, Section VI concludes our work.

## II. BACKGROUND

We provide an overview of 6TiSCH protocol, RPL Routing (Layer 3), 6TiSCH Schedulers (Layer 2) and the standards of multiple PHY's (Layer 1), relevant to the study.

**6TiSCH.** IETF 6TiSCH, the architecture for IPv6 over the TSCH mode of IEEE 802.15.4, provides mechanisms for efficient scheduling and coordination of the TSCH slot frame. IEEE 802.15.4-2015 did not address *how* communication can be scheduled while the standard introduced TSCH as a means for synchronizing and scheduling co-located communications over orthogonal channels. 6TiSCH fills this gap by allowing schedulers a way to manage communications across a network to avoid self-interference, i.e., contention between wireless devices, and provide optimized schedules for packet transmissions, reception, and sleeping (idling) for each time slot. Specifically, 6TiSCH has shared cells (shared with neighboring nodes) and dedicated cells (of which task is specific and fixed for a certain time slot). Time synchronization of 6TiSCH cells is achieved by using the information contained in the Enhanced Beacons (EBs) and in the Keep Alive (KA) packets, which are periodically broadcast via the shared 6TiSCH cells.

**RPL Routing Algorithm (Layer 3).** Low-power wireless networks typically employ the lightweight distance-vector-based RPL routing protocol [11]. RPL uses a tree-like graph called a DODAG (Direction-Oriented Directed Acyclic Graph), ideal for data-collection use-cases. Usually, 6TiSCH is not dependent on RPL, but the two are often used in conjunction, e.g., in the Orchestra scheduler [12]. Specifically, when employing RPL's Non-Storing mode, RPL control traffic can create overhead as the network scales [13]. We can mitigate this overhead by using orthogonal wireless communication channels for the control packets separated from the channels used for data packets while using 6TiSCH.

**Scheduling Algorithm (Layer 2).** Within 6TiSCH, schedulers play an important role on network performance, determining how the 6TiSCH cells coordinate with each other. For instance, Orchestra [12] allows nodes to autonomously manage their own schedules, assigning roles (e.g., advertising, dedicated, or shared) and particular tasks (e.g., sleep, transmit a packet, or receive a packet) based on current traffic. On the other hand, 6TiSCH Minimal Scheduling Function (MSF) [14] is a minimal scheduler implementation analogous to slotted CSMA. This study examines PHY performance over these two schedulers.

**Physical Layer Standards (Layer 1).** Traditionally both 6TiSCH and RPL routing protocol have been practically based on IEEE 802.15.4 PHY, with much of the existing literature focused on the 2.4 GHz OQPSK-DSSS variant. While this allows a greater data-rate (250 kbps) than the sub-GHz IEEE 802.15.4 PHYs (typically a few tens of kbps), this severely limits radio range. Recently introduced multi-PHY chips (in particular, the nRF52840 [4] has become a popular platform in the low-power wireless community) target *both* IEEE 802.15.4 *and* BT 5 (Bluetooth Low Energy) PHY

TABLE I: Simulation Settings.

Parameter	BT 5 2M	BT 5 1M	BT 5 500K	BT 5 125K	IEEE 802.15.4
<b>MAC layer (TSCH) settings</b>					
Scheduler	Orchestra / 6TiSCH minimal				
ACK size, bytes	2				17
ACK wait time, $\mu$ s	150				400
RX wait time, $\mu$ s	150				2,200
MAC header size, bytes	6				23
Slot duration, $\mu$ s	1,064	2,120	4,542	17,040	4,256
<b>Other layer settings</b>					
Routing Protocol	RPL				
Traffic pattern	Peer-to-peer				
IP fragmentation	No				
App packet period, sec	160				
App packet size, bytes	251				102
PHY overhead (bytes)	9	8	26.875	9	8
Byte duration, $\mu$ s	4	8	16	64	32
<b>RF env. settings [15]</b>					
Radio Medium	Unit Disk Graph (UDGM)				
Co-channel rejection, dB	-8				-3
Home @ 0 dBm	23 m	26 m	40 m	43 m	30.5 m
Industrial @ 10 dBm	73.6 m	92 m	184 m	368 m	175 m
Outdoor @ 10 dBm	170 m	212 m	413 m	473 m	346 m

configurations - introducing the possibility of higher data rates (BT 5 2M and BT 5 1M) and longer radio ranges (BT 5 500K and BT 5 125K). This study examines 6TiSCH performance over IEEE 802.15.4 OQPSK-DSSS and all four BT 5 PHY options for both Orchestra and MSF, taking into account typical radio sensitivity and ranges in *home*, *industrial*, and *outdoor* environments (see Table I).

## III. RELATED WORK

The authors of [8, 9] use differently modulated physical layers (FSK (low-rate), OFDM (high-rate), and O-QPSK (medium-rate)) to achieve runtime PHY selection in Industrial IoT (IIoT). They show that the long-ranged, low-rate PHY exhibits the best reliability and latency at the cost of significant (10x) degrade in battery life compared to O-QPSK, which exhibits the opposite trend. OFDM offers a balance between FSK and O-QPSK. Distributed PHY with a parent selection scheme is proposed in [6]. Although all the above works performed practical experiments, they are confined to a limited number of nodes (at the scale of 50). IIoT networks can have various nodes ranging from low (below 50) to high (above 100) in different indoors and outdoors.

Badihi et al. [16] develop a system-level simulator to evaluate BT 5 PHYs at scale. Specifically throughput, packet error rate (PER), end-to-end delay, and battery life. BT 5 2M offers the highest throughput, lowest PER, lowest delay, and longest battery life due to the high bit rate and fewer collisions. Conversely, the BT 5 125K coded PHY has the worst performance due to its large packet size and collisions.

Mohamadi et al. [17] move one layer above from PHY and focuses on the performance of the two schedulers: Orchestra

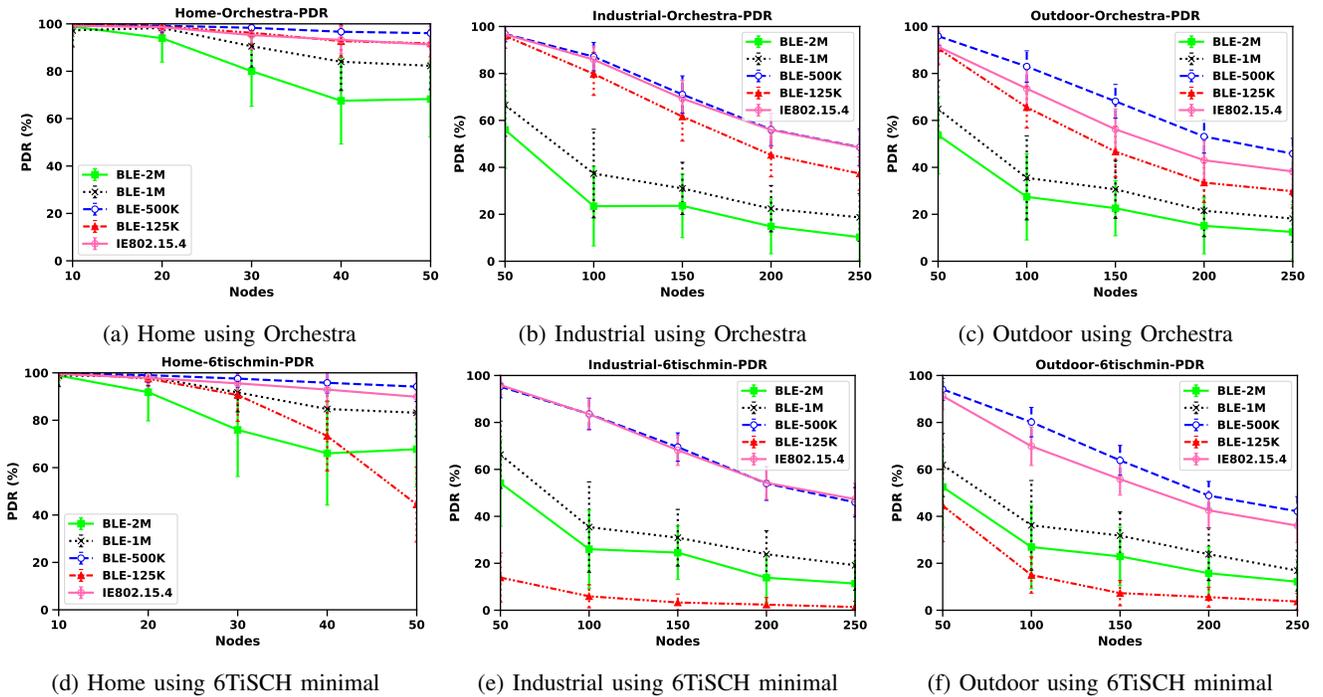


Fig. 1: Packet Delivery Ratio (%).

and MSF, over varying network density and packet rates at a scale of 98 nodes. The simulation results reveal that Orchestra is more reliable due to fewer collisions and prioritizing between slot frames and consumes less energy due to more sleep time slots. On the contrary, MSF achieves a better latency due to the low number of time slots and consumes less computing/memory resources. However, the authors in both papers consider only one use case (e.g., open office space) with at most 100 nodes that do not cover various indoor and outdoor IIoT environments and scales. [7] and [18] both combine TSCH with Synchronous Flooding-based communications for high reliability signalling. Again, the solution is tested over a limited number of nodes in an indoor environment.

#### IV. EVALUATION SETUP AND METRICS

We implement and evaluate the five PHYs (BT5 and IEEE 802.15.4), and two 6TiSCH schedulers (Orchestra and MSF) in the TSCH-Sim simulator [10]. TSCH-Sim is a recent protocol-level simulator for investigating TSCH networks at scale and provides a 6TiSCH stack implemented on top of IEEE 802.15.4 PHY. We modified TSCH-Sim parameters and the original simulation code to take into account the differences between the IEEE 802.15.4 and BT5 standards, including different data rates and radio ranges (Table I), where radio ranges are estimated based on [15].

Network topology is a randomly generated mesh without any disconnected partitions, while mesh density (i.e., degree per node) depends on the PHY range. For the shortest-range PHY, BT5 2M, the average node degree is set to 6.5 when generating the topology. The same node locations are reused for other PHY layers, meaning that the number of connections

per node is higher in these longer-range PHYs. We then varied the number of nodes depending on the network type: for the home environment, a relatively small number of nodes are simulated, ranging between 10, 20, 30, 40, and 50 nodes. We considered 50, 100, 150, 200, and 250 nodes for industrial and outdoor environments to better represent the scale of such deployments (Table I).

We repeated each simulation 100 times to calculate the mean and standard deviation, and each individual simulation was run for 300 seconds. Specifically, we evaluate across the following metrics:

**Packet Delivery Ratio (PDR).** The ratio of the total number of packets delivered to the destination nodes to the total number of packets sent from the source nodes, and measures communication reliability.

**Latency.** Time interval between the generation and reception of an application-layer packet. Both physical-layer (e.g., data rate) and higher-layer parameters (e.g., number of MAC retransmissions, routing topology) have impact on latency.

**Radio Duty Cycle (RDC).** The ratio between the time the radio is on and the total simulation time. The RDC we report only accounts nodes that have successfully joined the TSCH network and ignores the time spent in the scanning phase, as we are not focused on investigating the network formation performance in this paper. RDC strongly correlates with the total energy usage.

#### V. RESULTS AND DISCUSSION

We discuss the results, making observations with respect to the three RF environments and two 6TiSCH schedulers.

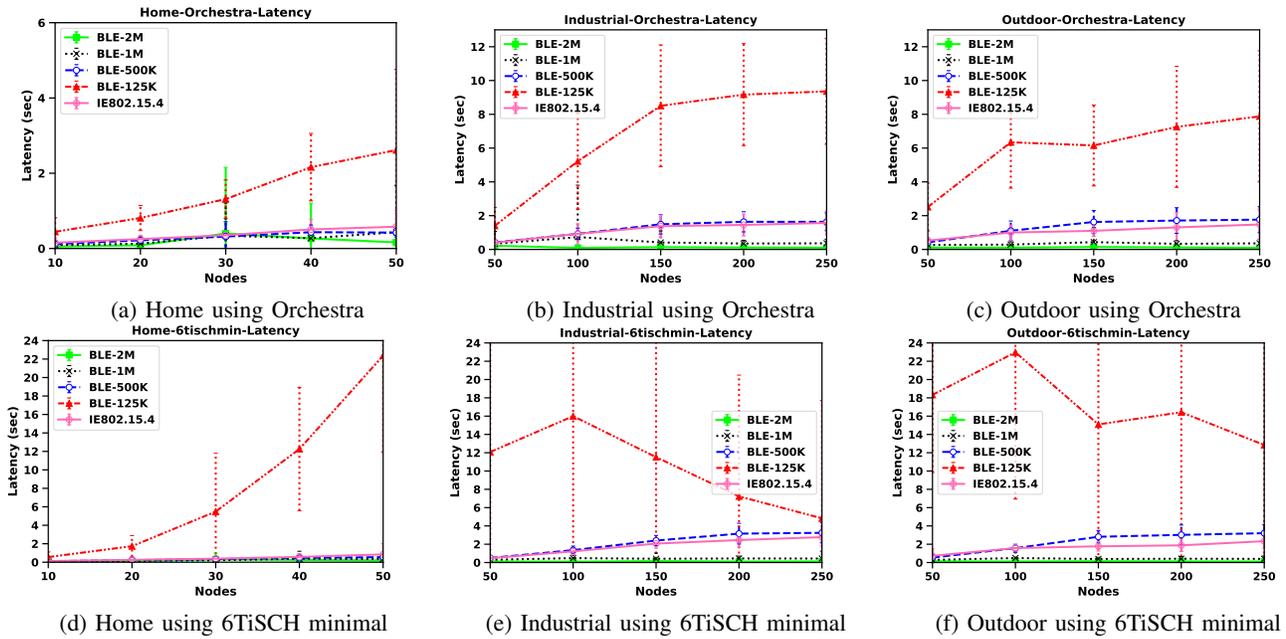


Fig. 2: End-to-end latency in seconds.

**Packet Delivery Ratio (PDR).** Figure 1 shows, in a *home* RF environment, BT5 500K has the highest PDR with the Orchestra followed by IEEE 802.15.4, BT5 125K, BT5 1M, and BT5 2M. This trend is similar in 6TiSCH minimal except for the BT5 125K. Specifically, Orchestra offers a similar PDR to IEEE 802.15.4, while in 6TiSCH minimal, BT5 125K’s PDR drastically decreases as the number of nodes increases. We observe that BT5 125K yields the largest collisions in both Orchestra and 6TiSCH minimal with a larger scale in 6TiSCH minimal. A high surge of collisions reflects the packet delivery problems, which explains the lower PDR of BT5 125K than expected. Note that BT5 125K has the most extended radio range; thus, the highest node degree or neighbors. A transmitting node with such a long-range PHY enables packets to travel fewer hops. However, a large number of links also increases the probability of collisions.

On the other hand, in the case of BT5 2M, the radio range is the shortest one, i.e., low node degree, which seems useful to reduce collisions. However, conversely, BT5 2M has the highest transmission rate along with the largest number of hops. In such a case, packets therefore compete for resources at each forwarding transmission. As the number of nodes increases, the chance of collisions also increases and impacts the PDR. Thus, a PHY that can balance the radio range and packet rates like BT5 500K or IEEE 802.15.4 becomes the winner.

In industrial IoT, the PDR trend is similar to that of the home network for the Orchestra scheduler, with a few exceptions. For example, we clearly see two groups of PHYs: BT5 500K, IEEE 802.15.4, and BT5 125K (is the worst among 3) and BT5 1M and 2M. Also, the average PDR is slightly low for all PHYs compared to the home networks. We suspect that it may be due to the industrial environmental settings. Also,

the scale of the network in IIoT is way higher than that of the home environment. In the case of 6TiSCH minimal, we observe a similar performance trend like in-home, i.e., BT5 125K has the worst performance, whereas BT5 500K and IEEE 802.15.4 have the best PDR. Finally, when we move to outdoors with the same scale as in industry, we observe a quite similar performance in both the schedulers to that of IIoT.

Overall, we conclude that Orchestra outperforms 6TiSCH minimal for the BT5 125K. Otherwise, their performance is similar in all three environments. In the case of the remaining PHYs, BT5 500K or IEEE 802.15.4 can safely be deployed to offer high PDR in any of the environments we considered. These two schemes can balance the radio range and traffic rate to reach destinations over a reasonable number of hops with low interference.

**Latency.** Figure 2 presents the average latency in all three environments for the two schedulers. In a home network, while using Orchestra BT5 2M, BT5 1M, BT5 500K, and IEEE 802.15.4 have a very similar latency with BT5 2M has a slightly better result, especially with fifty nodes. The latency of BT5 125K is significantly higher compared to the rest of the schemes. Also, the variation in latency is quite large. In the 6TiSCH minimal scheduler, the performance trend is similar to that of Orchestra with a lower variation in latency except for BT5 125K. We suspect two factors contribute to this variation: the number of collisions and the backoff algorithm to access the wireless channel. The high number of collisions forces packets to get retransmitted. During that retransmission, packets wait for a random amount of time; once they get the opportunity to grab the channel, there can be collisions again in the presence of high collision probability (e.g., for BT5 125K). Also, packets may travel a slightly different route due

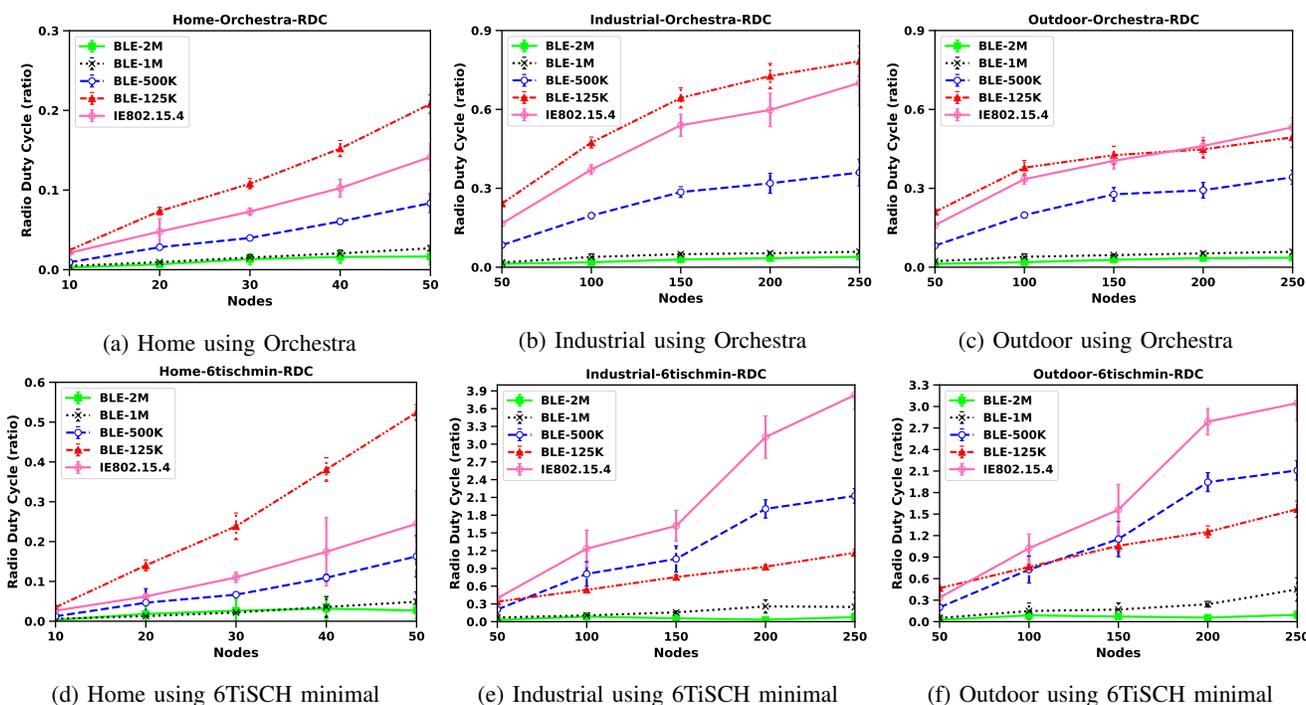


Fig. 3: Radio Duty Cycle.

to the retransmission, impacting the latency.

Another observation is the impact of number of nodes on the latency, where the performance trend is similar across all environments over the chosen schedulers, i.e., the larger the number of nodes, the higher the latency. For example, the latency increases slightly when the number of nodes increases from ten to fifty. Packets need to traverse a slightly longer route while having a larger network. Also, the probability of collisions increases with the increasing number of nodes and impacts the latency. However, BT 5 125K is clearly the worst one with an unstable behavior among all PHYs due to its high number of collisions with the longest radio range. Overall, in the home networks, 6TiSCH minimal has a better and stable latency trend (low variation) compared to the Orchestra.

In industrial networks, we clearly identify three groups of PHYs for both the schedulers. Specifically, BT 5 2M, BT 5 1M have the lowest latency (at the ballpark of 500 ms even for a large number of nodes). BT 5 500K, and IEEE 802.15.4 are the next two PHYs with slightly higher latency, while BT 5 125K has the worst performance. The radio range and hence the number of collisions is the main driving force for such latency trend, i.e., a shorter radio range can avoid collisions significantly and offer a better latency. As home networks, we observe that 6TiSCH minimal has a stable latency trend compared to the Orchestra. However, one interesting point is the performance of BT 5 125K over 6TiSCH minimal, where the latency drastically degrades for the number of nodes higher than 150. With that high number of nodes, packet delivery rates

significantly drop for BT 5 125K and hence the reported latency from successfully delivered packets. Finally, outdoors offer a performance trend similar to that of the industrial networks.

Overall, the latency trend is similar across different network environments over the Orchestra and 6TiSCH minimal schedulers except for BT 5 125K. This PHY shows different behavior for the two schedulers. In both cases, the latency is quite high, which we explained above. However, the overall latency trend of BT 5 125K is different for Orchestra and 6TiSCH minimal. In the former case, the latency increases in a different magnitude with the increasing number of nodes in all three environments. However, in the latter case, the latency starts falling after the number of nodes reaches 100. We suspect that the behavior is related to the high collisions and the low number of successful packet delivery, i.e., the average latency reflects those packets reaching destination perhaps over short routes.

**Radio Duty Cycle.** Across all environments, the radio duty cycle (RDC) at each PHY increases with respect to the number of nodes (see Figure reffig:dc). As expected, radio-on time roughly follows the PHY data rates, with the lowest data rate PHYs exhibiting the highest RDC. Interestingly, any difference in RDC is less pronounced on the two BT 5 1M and 2M PHYs – despite the latter being twice the rate of the former. Furthermore, there is very little increase in RDC as the network scales, while the reliability results in Figure 1 show that both PHYs suffer significantly in larger networks. This behavior is explained by the fact that the RDC depends on the packet

transmission rate. In networks where the majority of packets are lost near the source nodes, the RDC results appear to be better than they would be if all packets would reach their destinations.

In home networks, BT5 1M and 2M PHYs offer the lowest RDC while BT5 125K has the worst. BT5 500K and IEEE 802.15.4 in between with the latter one having the worse RDC. An interesting observation is that within the industrial and outdoor environments, the RDC difference between BT5 125K and IEEE 802.15.4 is far less pronounced over Orchestra. Specifically, in the outdoor environment, BT5 125K performs better at extremely large network sizes ( $\geq 250$  nodes). This trend is likely due to the receiver sensitivity gains on the BT5 125K PHY over the DSSS employed in IEEE 802.15.4, which are more advantageous in outdoor LOS scenarios. Finally, RDC increases significantly for all PHYs when using 6TiSCH minimal compared to Orchestra, at around  $1.6x \sim 2.3x$ . This is to be expected, as Orchestra tries to schedule optimal transmissions based on the RPL DAG, while MSF is analogous to slotted CSMA and uses a shared slot for all traffic.

## VI. CONCLUSIONS

We start this work with three hypotheses: (i) that different PHY options are suited for different low-power wireless network applications, (ii) that adapting a network's PHY depending on RF or networking conditions could potentially lead to increased performance than using a single PHY layer, and (iii) that different schedulers may have a different impact on the performance of a PHY.

The results show clear evidence for the first hypothesis: different performance metrics benefit from using different PHY options. BT5 500K is the best option for applications that require high PDR; in contrast, the uncoded BT5 1M and BT5 2M options are better for applications that need to be optimized for delay or radio duty cycle. Equally, these two uncoded options greatly reduce the TSCH slot durations, increasing the communication speed and minimizing the radio-on time.

The same performance trends appear in *home*, *industrial*, and *outdoor* networks. We explain the lower-than expected performance of longer-range networks with a high number of collisions. As the radio range is increased, the average number of neighbors per node increases; consequently, there are more packet collisions and the PDR is reduced. This is especially clear for BT5 125K, which has a better PDR when Orchestra is used, as it reduces the number of collisions compared with 6TiSCH minimal. However, the remaining PHYs have a similar performance with both the schedulers.

Finally, to the best of our knowledge, this work also is the first to directly compare, in identical settings and at a scale of 100s of nodes, BT5-based 6TiSCH networks all four BT5 PHY options with IEEE 802.15.4 in multihop low-power wireless 6TiSCH networks. The results show that BT5 500K shows consistently higher PDR and lower energy consumption than IEEE 802.15.4 in nearly all of our experiments, while keeping the delay similarly low. Based on these discoveries, we plan

to design a high performance multi-PHY 6TiSCH IoT network protocol in our future work.

## REFERENCES

- [1] D. Saha *et al.*, "An Energy-Aware SDN/NFV Architecture for the Internet of Things," in *IFIP Networking*, Jun. 2020.
- [2] I. Haque *et al.*, "SoftIoT: A resource-aware SDN/NFV-based IoT network," *The Elsevier Journal of Network and Computer Applications*, Nov 2021.
- [3] P. Thubert, "An Architecture for IPv6 over the TSCH mode of IEEE 802.15.4," IETF, Internet-Draft draft-ietf-6tisch-architecture-24, Jul. 2019.
- [4] Nordic Semiconductors, "nRF52840 Product Specification, v1.1."
- [5] Texas Instruments, "CC2652R SimpleLink Multiprotocol 2.4 GHz Wireless MCU datasheet, Rev. H," Mar. 2021, [Online] <https://www.ti.com/product/CC2652R> – Last accessed: 2021-06-30.
- [6] G. Daneels *et al.*, "Parent and PHY Selection in Slot Bonding IEEE 802.15.4e TSCH Networks," *Sensors*, 2021.
- [7] M. Baddeley *et al.*, "6TiSCH++ with Bluetooth 5 and Concurrent Transmissions," in *Proc. of the 18<sup>th</sup> EWSN Conf.*, Feb. 2021.
- [8] M. Rady *et al.*, "No Free Lunch: Characterizing the Performance of 6TiSCH When Using Different Physical Layers," *Sensors*, vol. 20, 2020.
- [9] —, "g6TiSCH: Generalized 6TiSCH for Agile Multi-PHY Wireless Networking," *IEEE Access*, 2021.
- [10] A. Elsts, "TSCH-Sim: Scaling Up Simulations of TSCH and 6TiSCH Networks," *Sensors*, 2020.
- [11] T. Winter, "RPL: IPv6 Routing Protocol for Low-Power and Lossy Networks," IETF, Internet-Draft draft-ietf-roll-rpl-19, Mar. 2012.
- [12] S. Duquennoy *et al.*, "Orchestra: Robust mesh networks through autonomously scheduled TSCH," in *Proc. of the 13th ACM conference on embedded networked sensor systems*, 2015.
- [13] M. Baddeley, "Software Defined Networking for the Industrial Internet of Things," Ph.D. dissertation, Univ. of Bristol, UK, 2020.
- [14] T. Chang, M. Vučinić, X. Vilajosana, S. Duquennoy, and D. R. Dujovne, "6TiSCH Minimal Scheduling Function (MSF)," RFC 9033, May 2021.
- [15] NIST, U.S. Dept. of Commerce, "NIST Priority Action Plan 2, Guidelines for Assessing Wireless Standards for Smart Grid Applications," 2014.
- [16] B. Badihi *et al.*, "On the system-level performance evaluation of bluetooth 5 in iot: Open office case study," in *Proc. of the 16<sup>th</sup> ISWCS Conf.* IEEE, 2019.
- [17] M. Mohamadi *et al.*, "Performance evaluation of TSCH-minimal and Orchestra scheduling in IEEE 802.15.4e networks," in *Proc. of the 18<sup>th</sup> ISPS Conf.*, 2018.
- [18] O. Harms *et al.*, "Opportunistic Routing and Synchronous Transmissions Meet TSCH," in *Proc. of the 46<sup>th</sup> LCN Conf.*, 2021.