




QuakeSat:

Low Cost University/Commercial Nanosatellite Collaboration



Tom Bleier
James Cutler
Eric Tapio
Allen Lorenz
Bob Twiggs

tbleier@quakefinder.com
jwc@stanford.edu
eric.d.tapio@lmco.com
allenlorenz@charter.net
Bob.Twiggs@stanford.edu

QuakeSat and Team

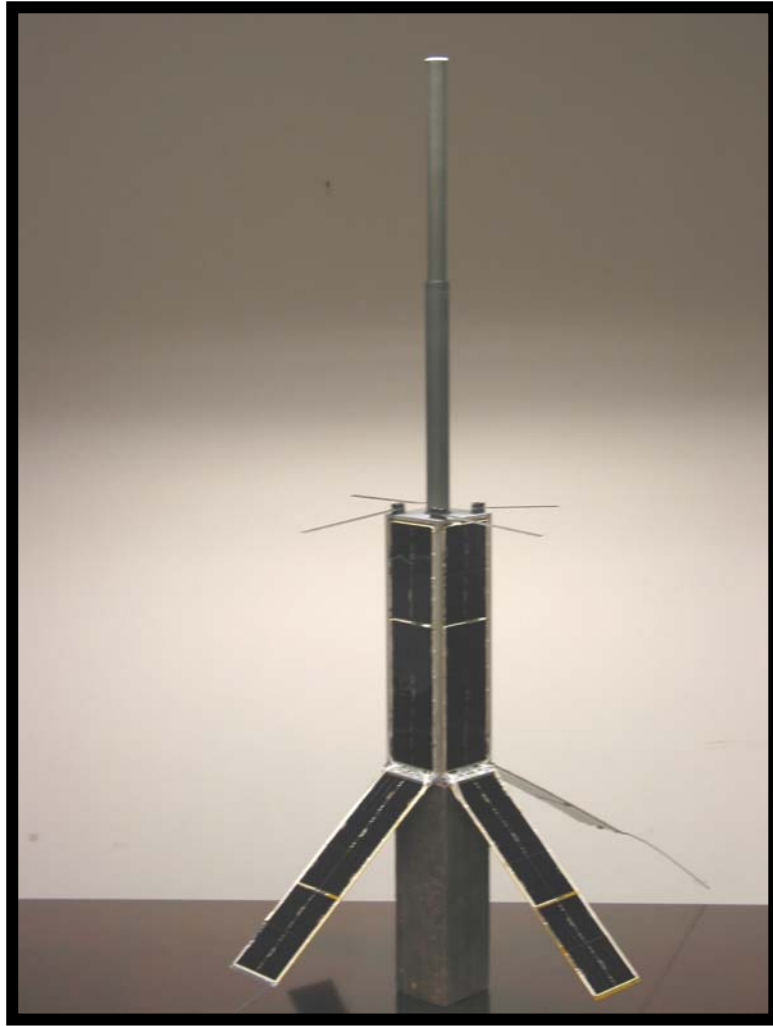

Nanosat (QuakeSat) Size

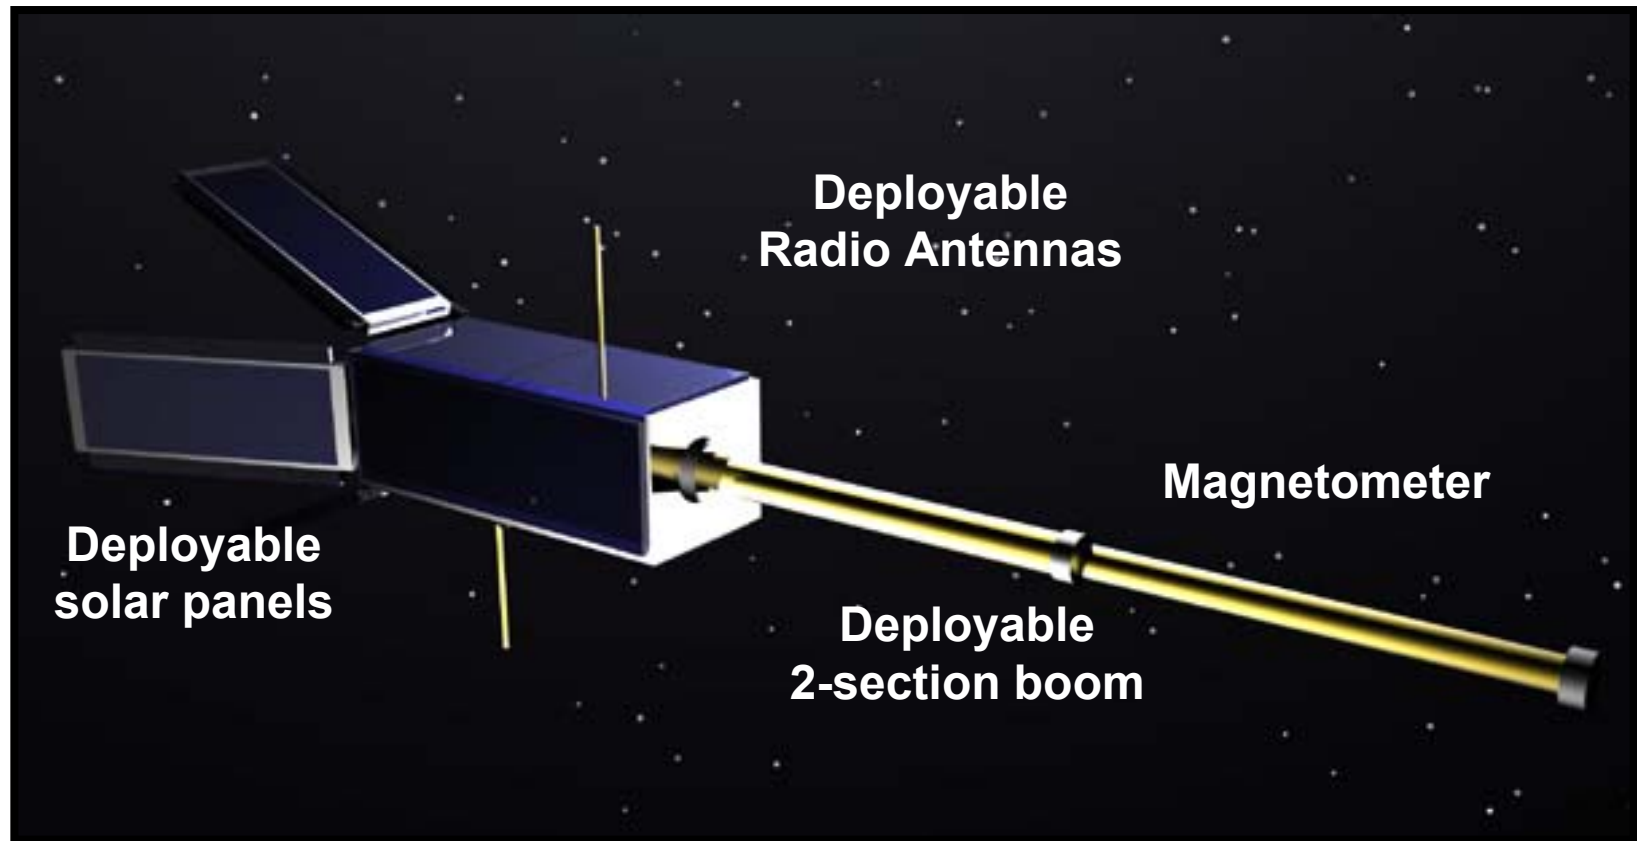


Total weight = 9.9 lbs (4.5 kg)

QuakeSat Status

- ▲ Successful launch on June 30, 2003
 - ▶ One of eight satellites
 - ▶ Eurockot booster (Plesetsk)
 - ▶ Breeze upper stage (restartable, multiple launcher)
- ▲ Orbit Parameters
 - ▶ 820 km, circular orbit
 - ▶ 98.8 degree Inclination
- ▲ 6 month expected life
(actual 7+ mos)
- ▲ 1 GB data (1700 files)



Satellite Example of ELF Magnetic Field Signals Associated with Earthquakes (Spitak Armenia)

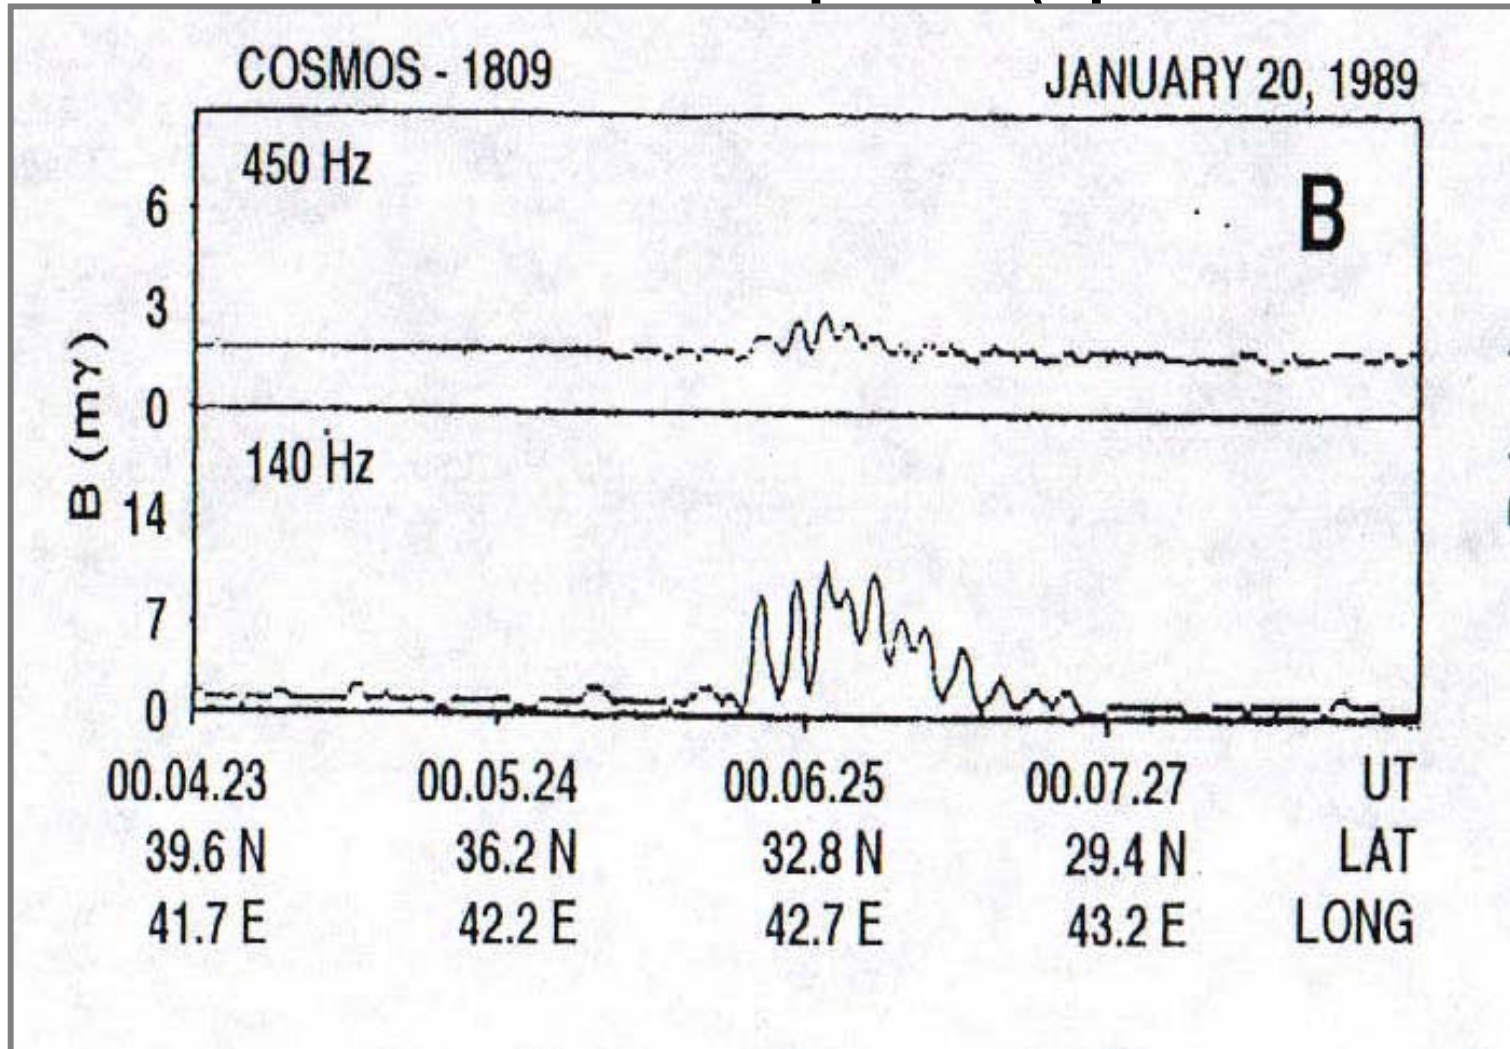


QuakeSat and P-POD



- Pros Linux
 - Drivers (baypac & ax25) built-in
 - <10k loc+linux = flight software
 - 3k loc for low level A/D timers
 - Utilities already written
 - Md5sums (error checking)
 - Bzip2 (file compression)
 - Shell utilities
- Pros Prometheus
 - 16 channel/16bit A/D built-in
 - Hardware timers/interrupts
 - Multitasking 66 MHz
 - 32 Meg RAM/128 Meg Flash
- Cons
 - Power hog 2.5 W
 - Flexibility require more testing!!



QuakeSat Tasking & Data Flow Concept

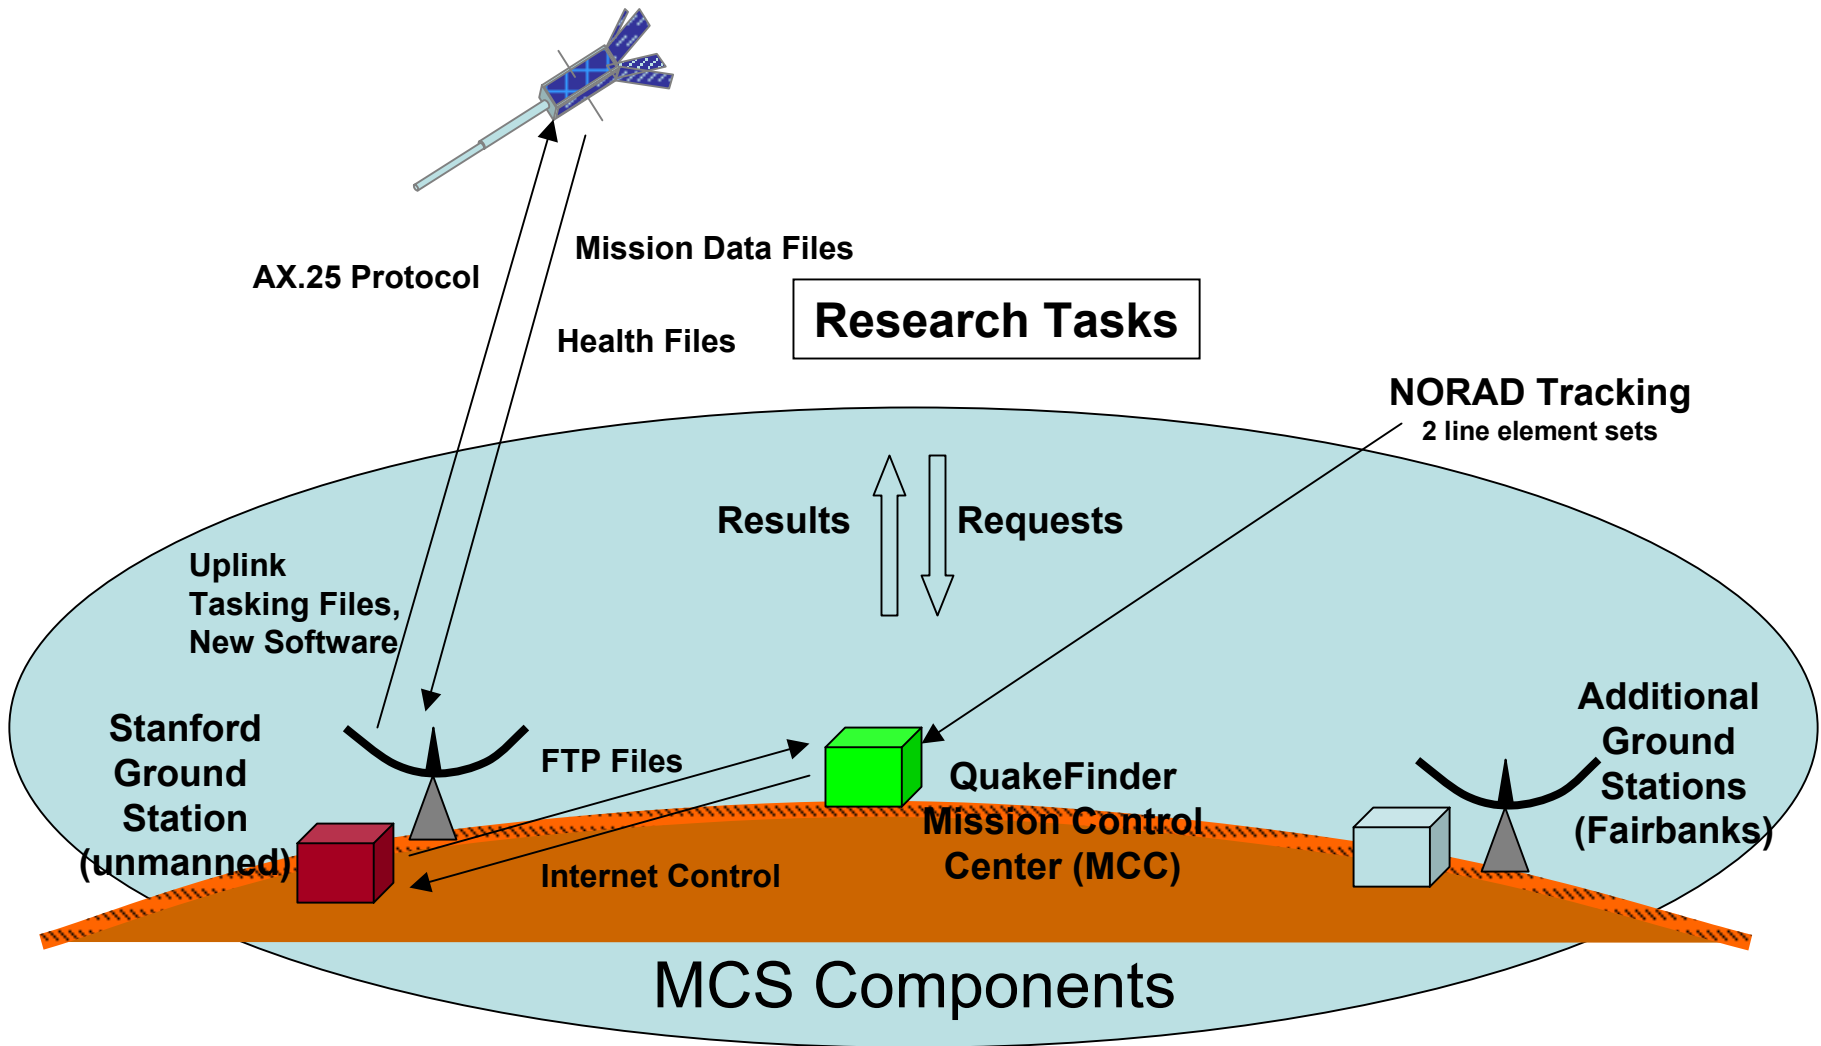




Mission: Earthquake Detection

ELF Signals Detected
near San Simeon

Dec. 22, 2004

M6.5 Quake


QuakeSat Offset Targeting

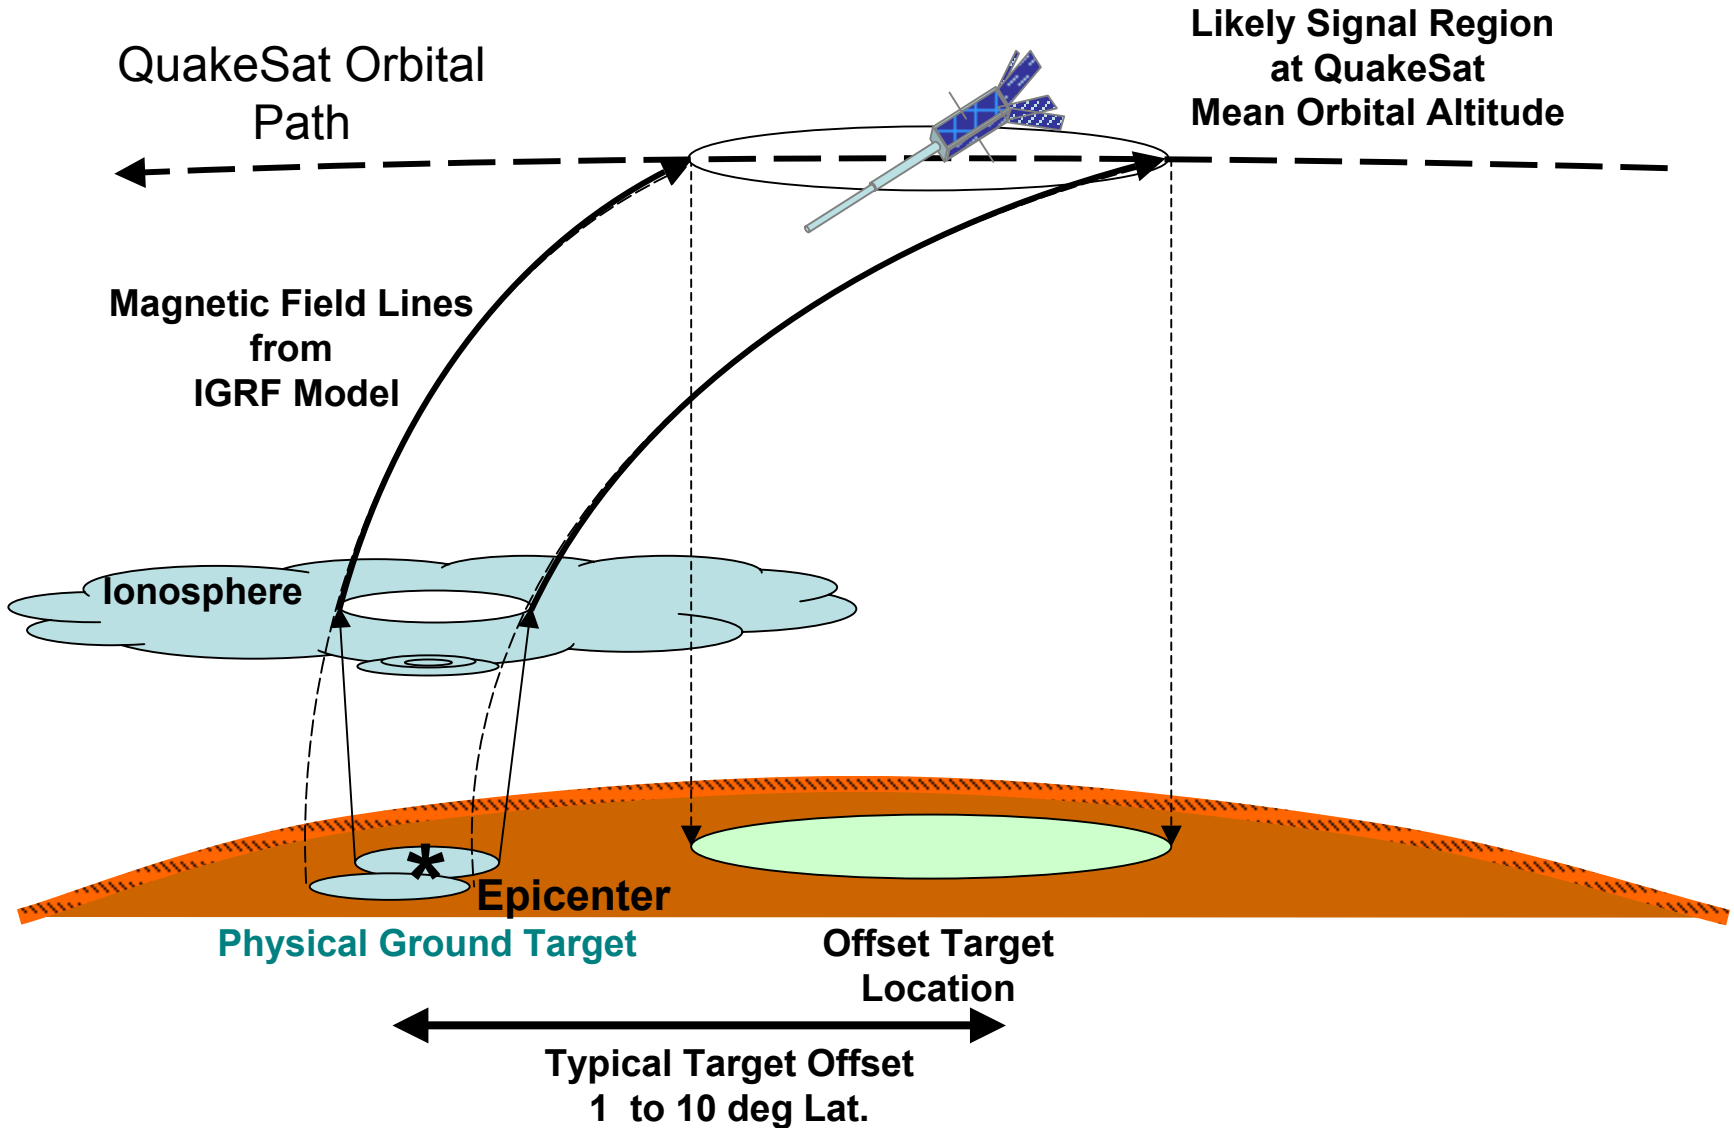


QuakeSat Collection Geometry




Averaged over 0.2 sec : MG2HXCalf1M14Dec0133B.raw (Time: 12/14/2003 01:33:08.37 UTC, Span = 0.100 - 305.173 sec)
[history: Squared, DC Removed]

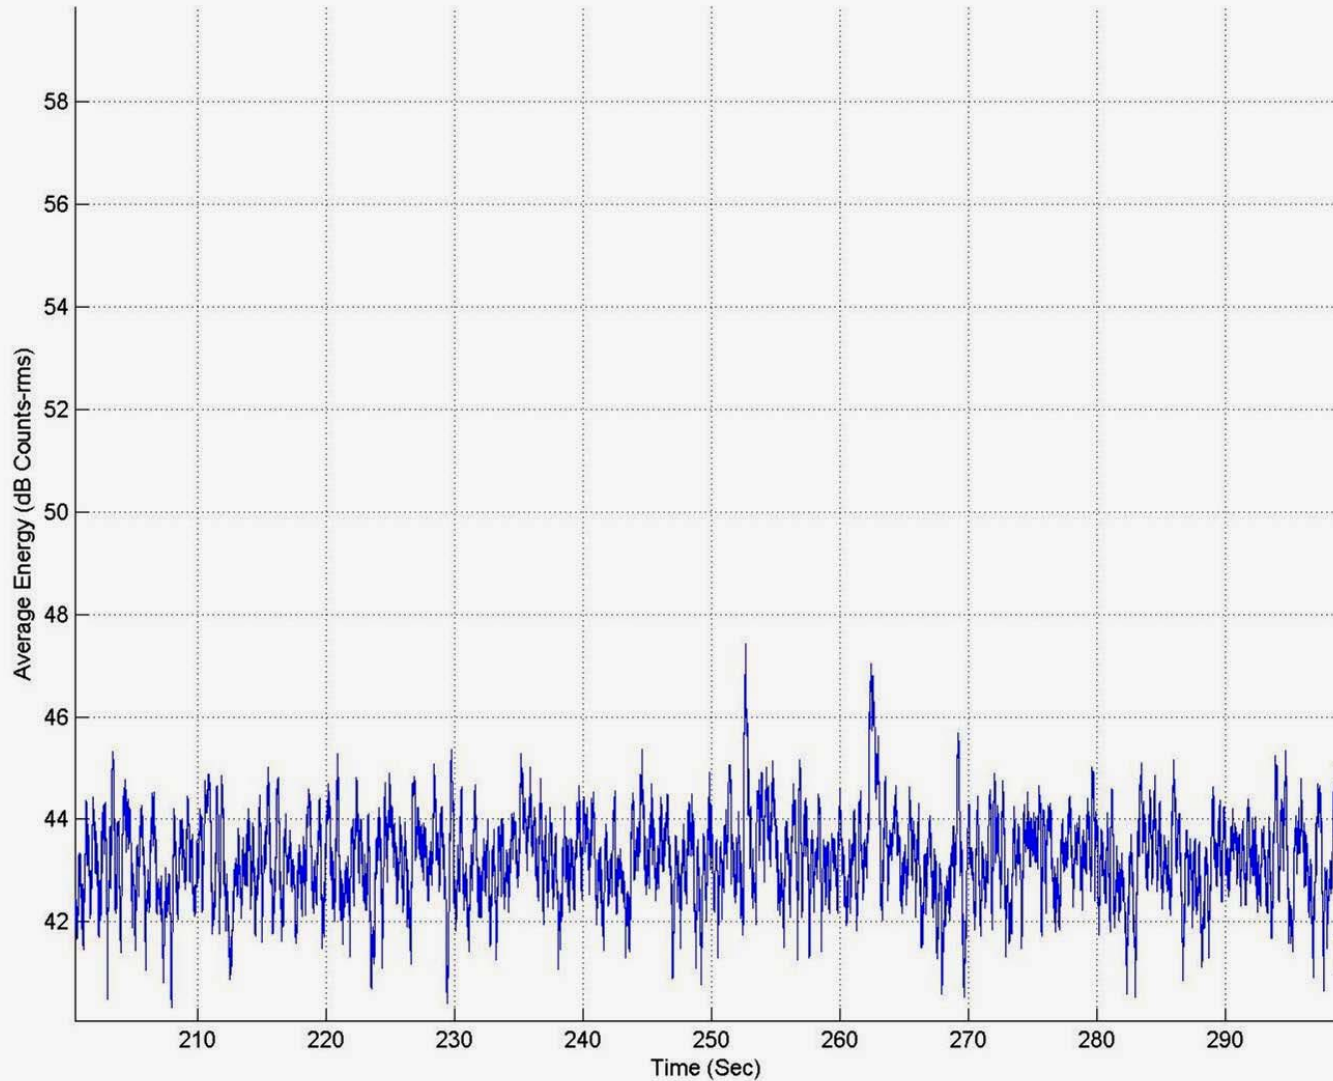


Frequency vs. Time Data : MG2HXCalf1M14Dec0133B.raw (Time: 12/14/2003 01:33:08.37 UTC, Span = 0.512 - 304.738 sec)

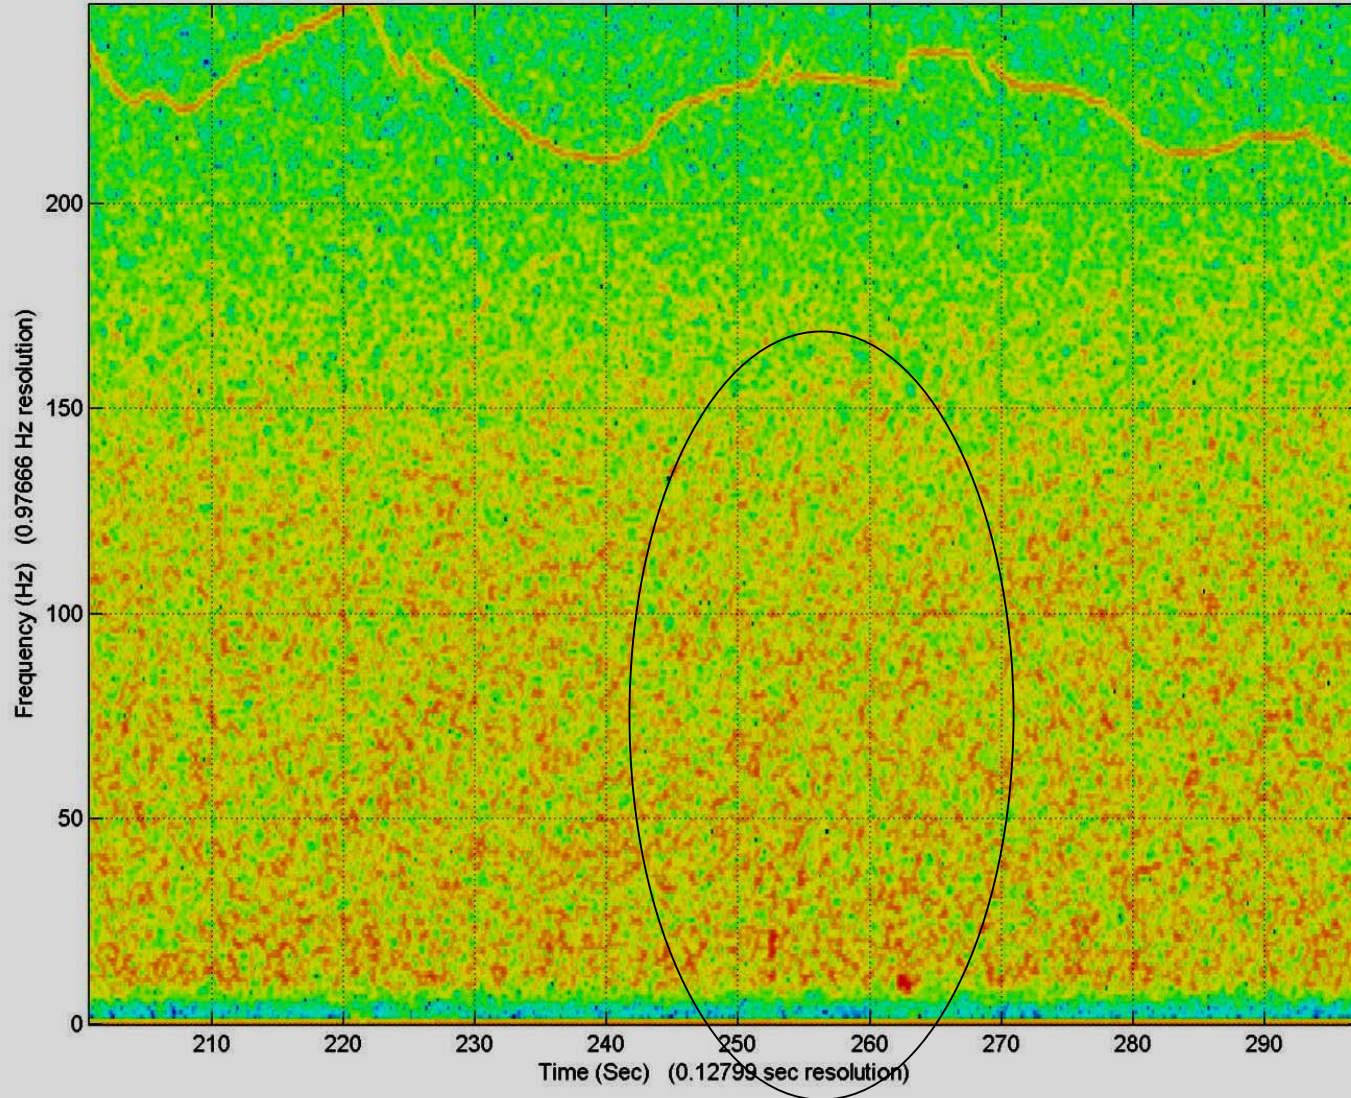

Averaged over 0.2 sec : MG2HXSsanSim1M30Dec0133B.raw (Time: 12/30/2003 01:33:26.39 UTC, Span = 0.100 - 181.290 sec)
[history: Squared, DC Removed]

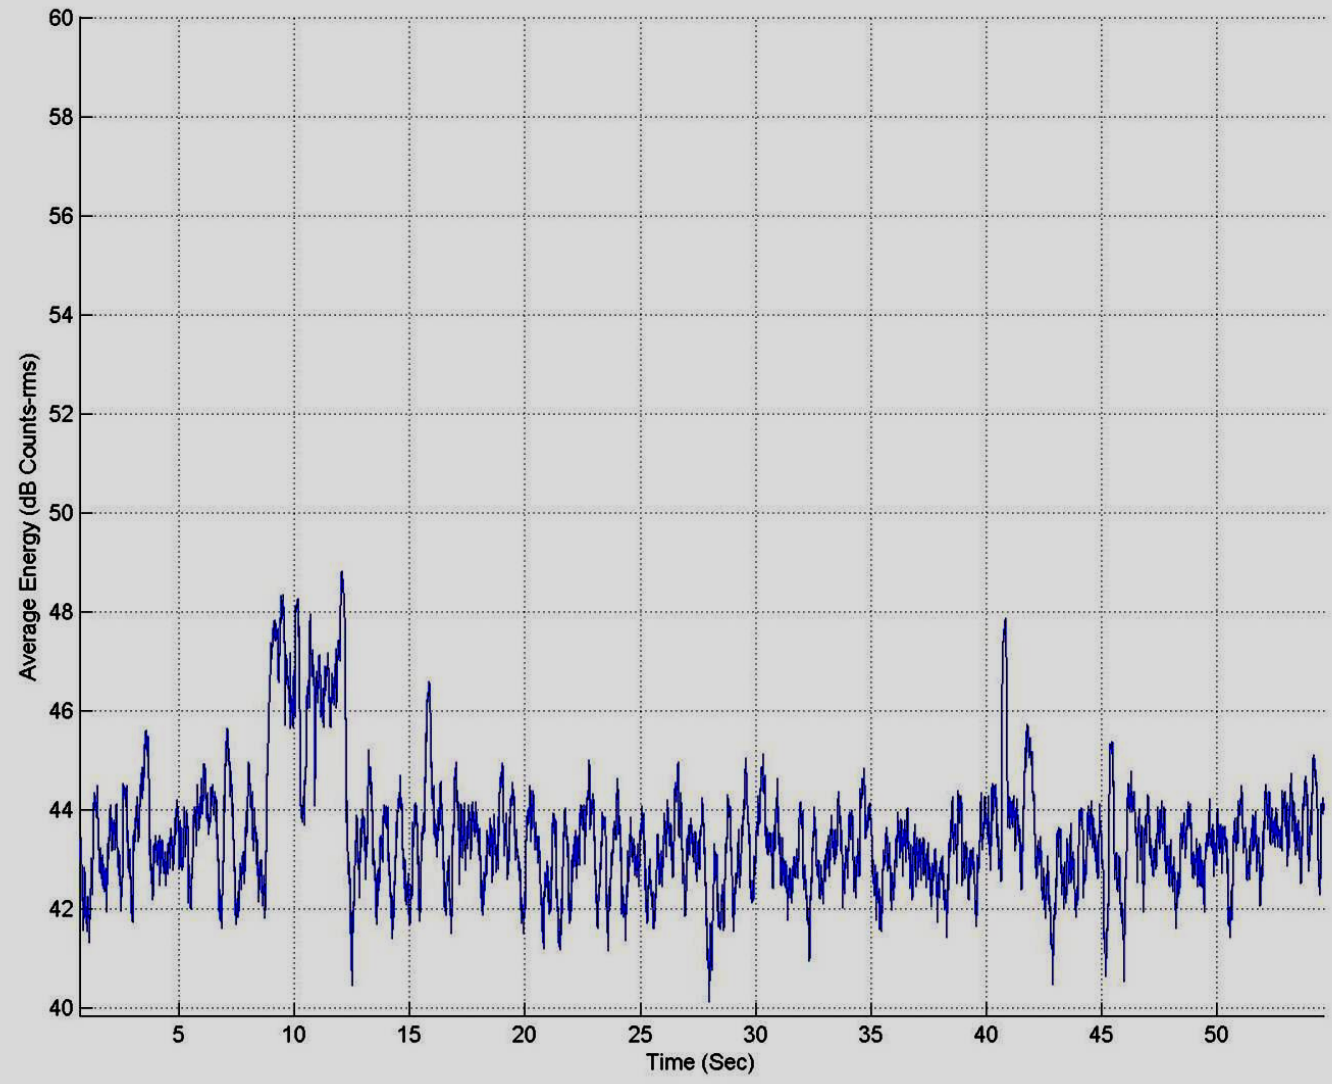

Frequency vs. Time Data : MG2HXSsanSim1M30Dec0133B.raw (Time: 12/30/2003 01:33:26.39 UTC, Span = 0.512 - 180.846 sec)

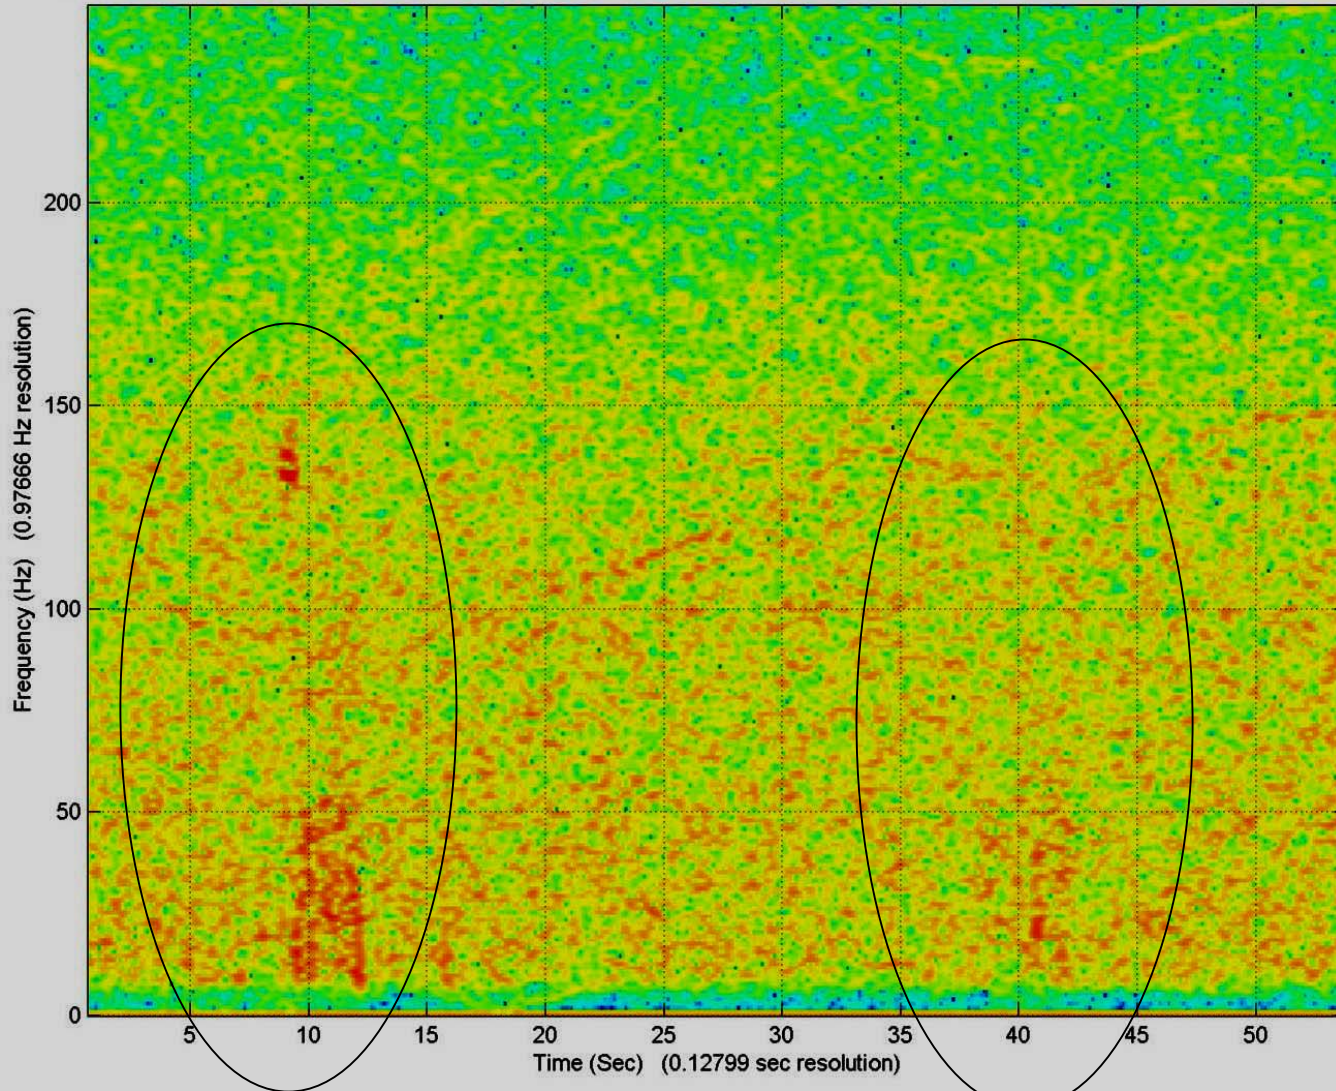

Lessons Learned for Students

- Define clearly what you want to accomplish
 - Short term mission (days-weeks) or long term (months+)
 - Construction and operations costs
- Have enough help (students, engineers, mentors)
- Have enough time
 - 12 mos for single, simple, satellite
 - 18-24 mos for larger more complex satellite
 - Include time for ITAR process and grd systems (station, Mission Control)
- Have enough funds
 - \$10-50K for satellite parts (assumes “free” access to testing facilities)
 - \$30-50K per kg for launch (assumes Russian launch)
 - Have 50% funding reserves (paying “customer” is preferred)
- Build a full prototype including the flight computer
 - Test it thoroughly, including end-to-end, with ground station
- Use good designs for grounding, and RF control
 - Unipoint ground, 3 layer boards with grd plane, EMI filters on power lines
 - Strongly consider using Stanford Ground Station (network)

- “You can’t build and launch a satellite for under \$10M”
- “You can’t do space science for under \$10M”
- University/industry collaboration is good
- Ideas & tech development from Universities
- Construction, integration, test, operations, facilities, support staff from Industry
 - Execution to a tight schedule
- Every barrier must be overcome
 - Borrowing facilities, using mentors, COTS parts
 - Finding multiple funding sources
- Positive attitude goes a long way


Back Up

QuakeSat Costs





- \$ 50K for satellite parts
 - Triple CubeSat (2 engr.models + flt model + sim)
 - Assumes “free” access to testing facilities
 - \$120K for Integration and Launch
 - \$30-50K per kg for launch (assumes Russian launch)
 - \$ 0K for 5 students (Stanford/LM) for 14 mos. part time
 - Mission design, S/W development, power, attitude, RF, testing
 - \$850 K QuakeFinder Costs
 - Design, build, test, integrate Magnetometer
 - Design, build, test, power/tlm and watchdog boards
 - Build mechanical structures (outsourced), Integrate, test
 - \$ 0K Stanford Ground Station (part of Phd. Project)
-
- Total cost to build and launch; \$1M
 - Operation cost: \$170K per mo.
 - Run operations: 2 shift per day, 5 days/wk (4)
 - Science Mission: Develop ops and signal analysis processes (3)

Cost of Satellite




- Losing all your weekends 1.5 years.
- Feeling guilty if you knocked-off before 10pm
- Cold pizza becoming a breakfast staple
- Count coffee drank by pots not cups
- Put on 20 lbs...
- Having to do more presentation/briefings than your day job
- YOU and your Nephew's thumbprint in space....
PRICELESS

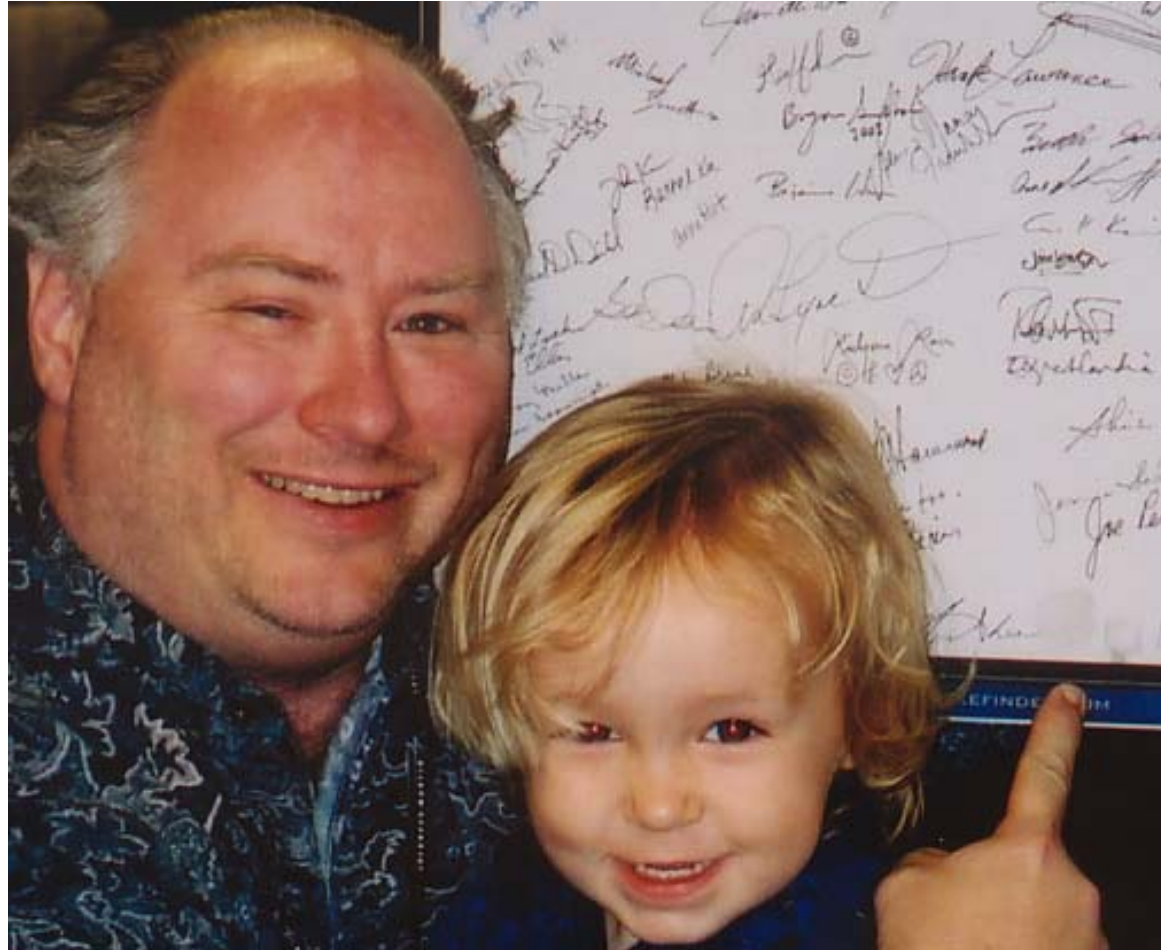

Mechanical Layout

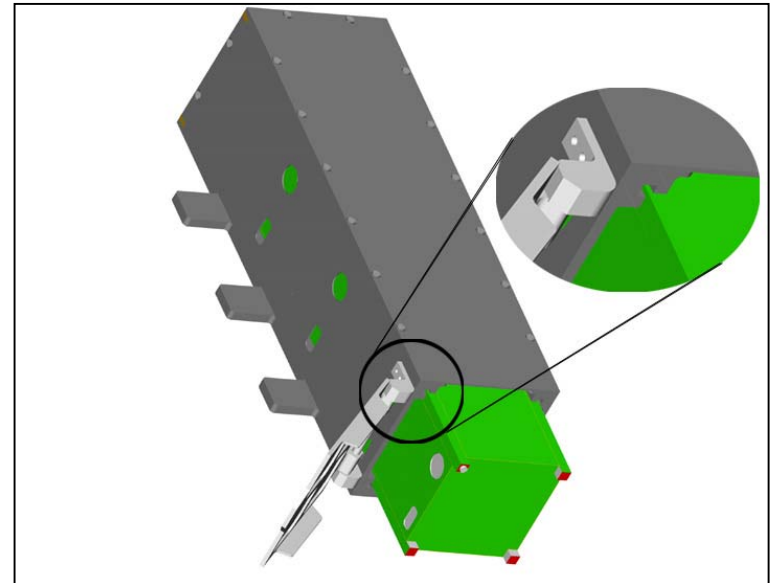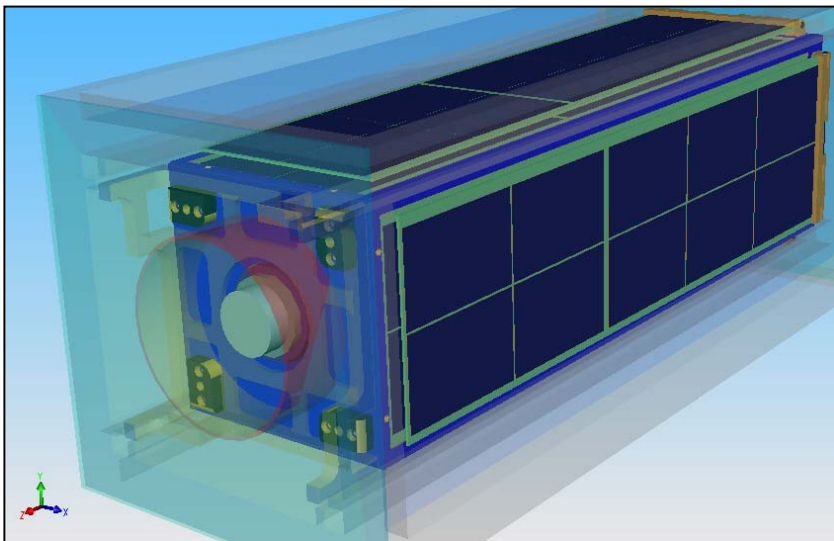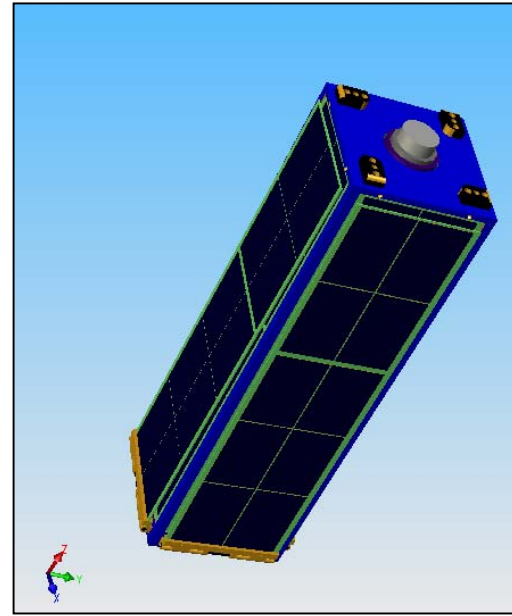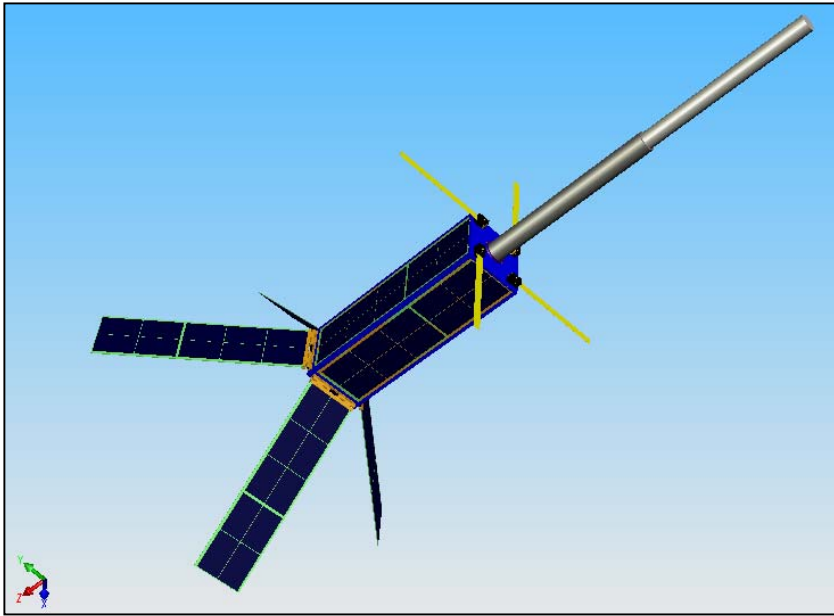


Mechanical Layout

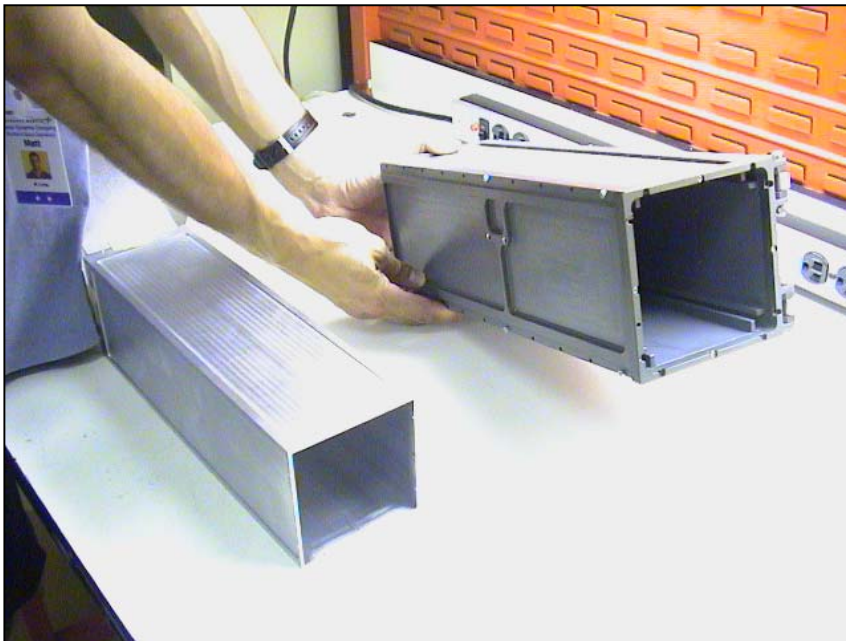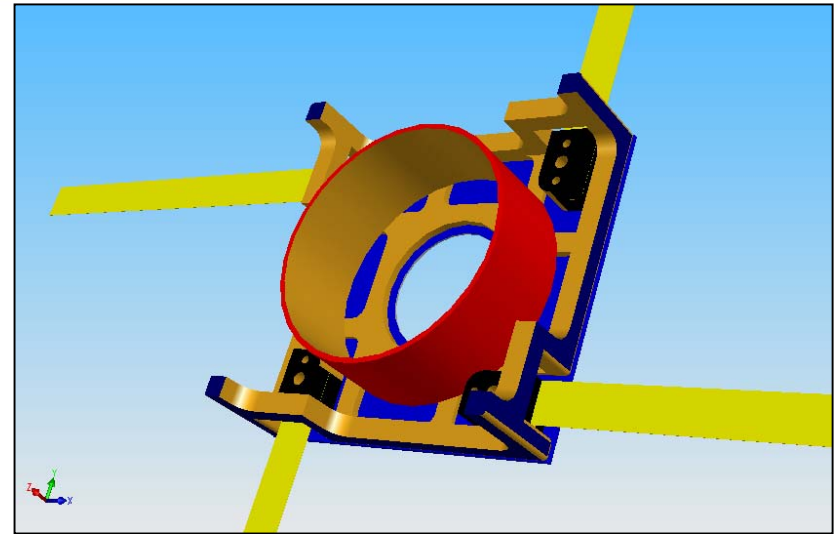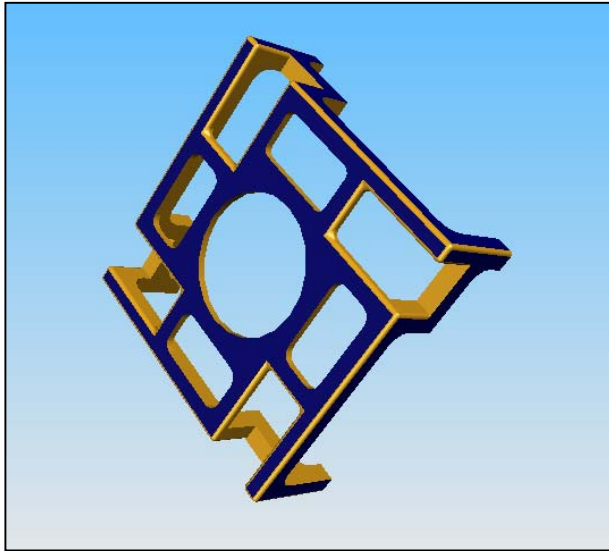



Payload Block Diagram

Rev.2

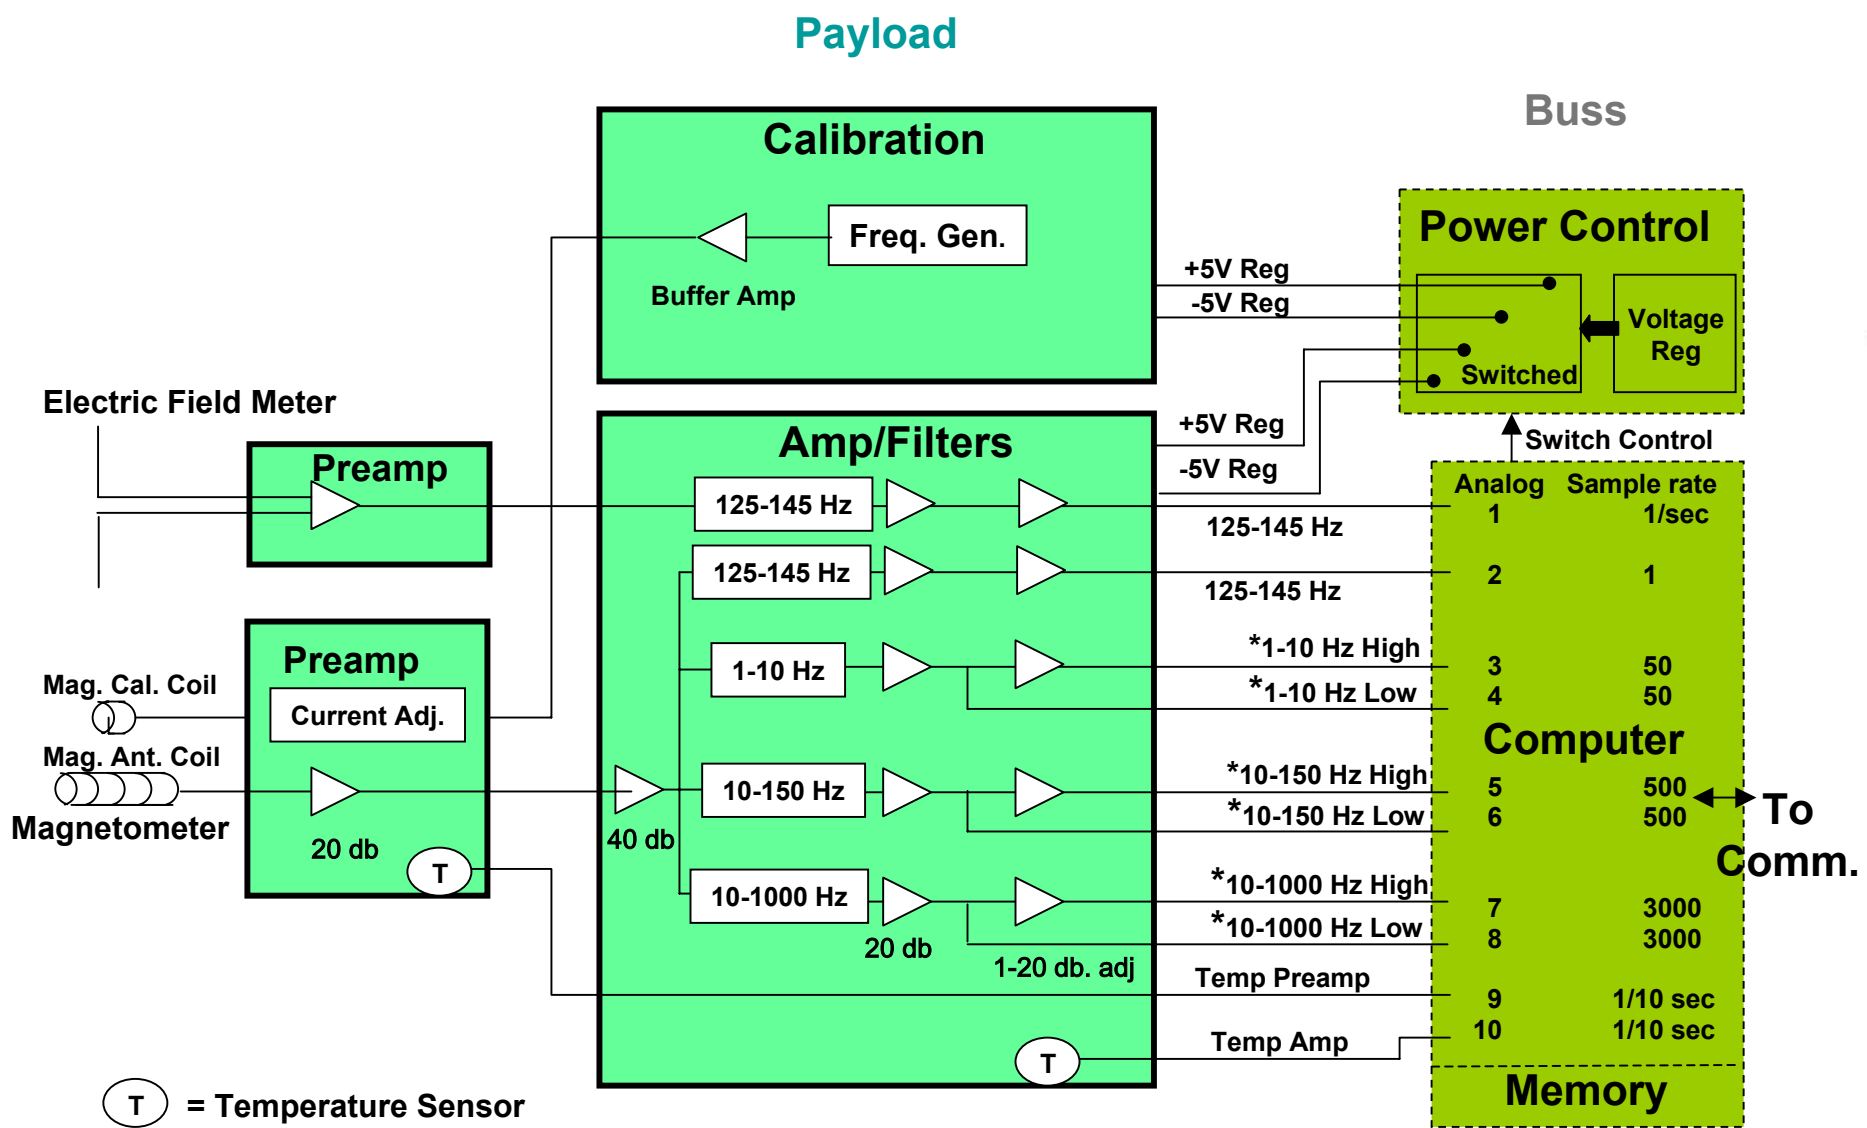

* These channels recorded only over predetermined areas of the earth

Communication

- 9600 baud, AX.25 packet system
- Stanford developed a customized version with PFR/PFS to handle packet control of long files (fill holes)
- Typical magnetometer and housekeeping file length is 100-300kB
 - Longest file in one pass: 700kB
 - Avg. 8 magnetometer collects per day (1 MB)
- Beacon every 10 sec. (disabled w/ mag. collects)
 - 33 data points plus time and date
- Stanford Ground Station (SGS)
 - Access via Internet, remote controlled, standardized I/F
 - 15 db Yagi, auto antenna control using EI Sets
 - New features being added, (polarity control, signal strength)

Government Approval Process

- Technical Assistance Agreements (ITAR) State Dept Requirement
 - Approval to discuss sensitive technology
 - For P-POD and QuakeSat
- DSP-5 (ITAR) -for permanent export of unclassified tech items and data
- DSP-73 (ITAR) -for temporary export (GSE) and items that go into orbit
- TTCP Technology Transfer Control Plan-new process (“self monitoring”)
 - DoD requirement
- AMSAT Frequency Coordination Request
- FCC Frequency request
 - Experimental Satellite
- NAFTA (Required for ITAR items)
- Commercial Invoices, Shippers Letters of Instructions
- Russian Satellite Value Declarations and Duties

- ½ time for 6 mo. (internal staff, then consultant)

QuakeSat History


- Stanford (Prof. Bob Twigg) started class 2001
 - Students to build “CubeSats” (4” x 4” x 4”)
 - launched 3 at a time in a P-POD (Cal Poly)
- 2001/2002 class building 4 CubeSats, and needed payloads
- QuakeFinder built and donated ELF payload and provided technical assistance

Hypotheses for Origin of ELF/ULF Earthquake Signals


- ✦ Cracking crystalline rock (resulting electron release and plasma currents) Nitsan, '77 GRL
- ✦ Semiconductor nature of rock under stress (charge carriers, resulting currents and high fields) Freund, '02 AGU
- ✦ Electrokinetic (dilatancy, streaming ionic water, resulting currents/fields)
- ✦ Piezeomagnetic effects (rock stress and resulting weak magnetic fields)

Loma Prieta Earthquake San Francisco Oct 18, 1989


Extremely Low Frequency (ELF) Magnetic Field Fluctuations

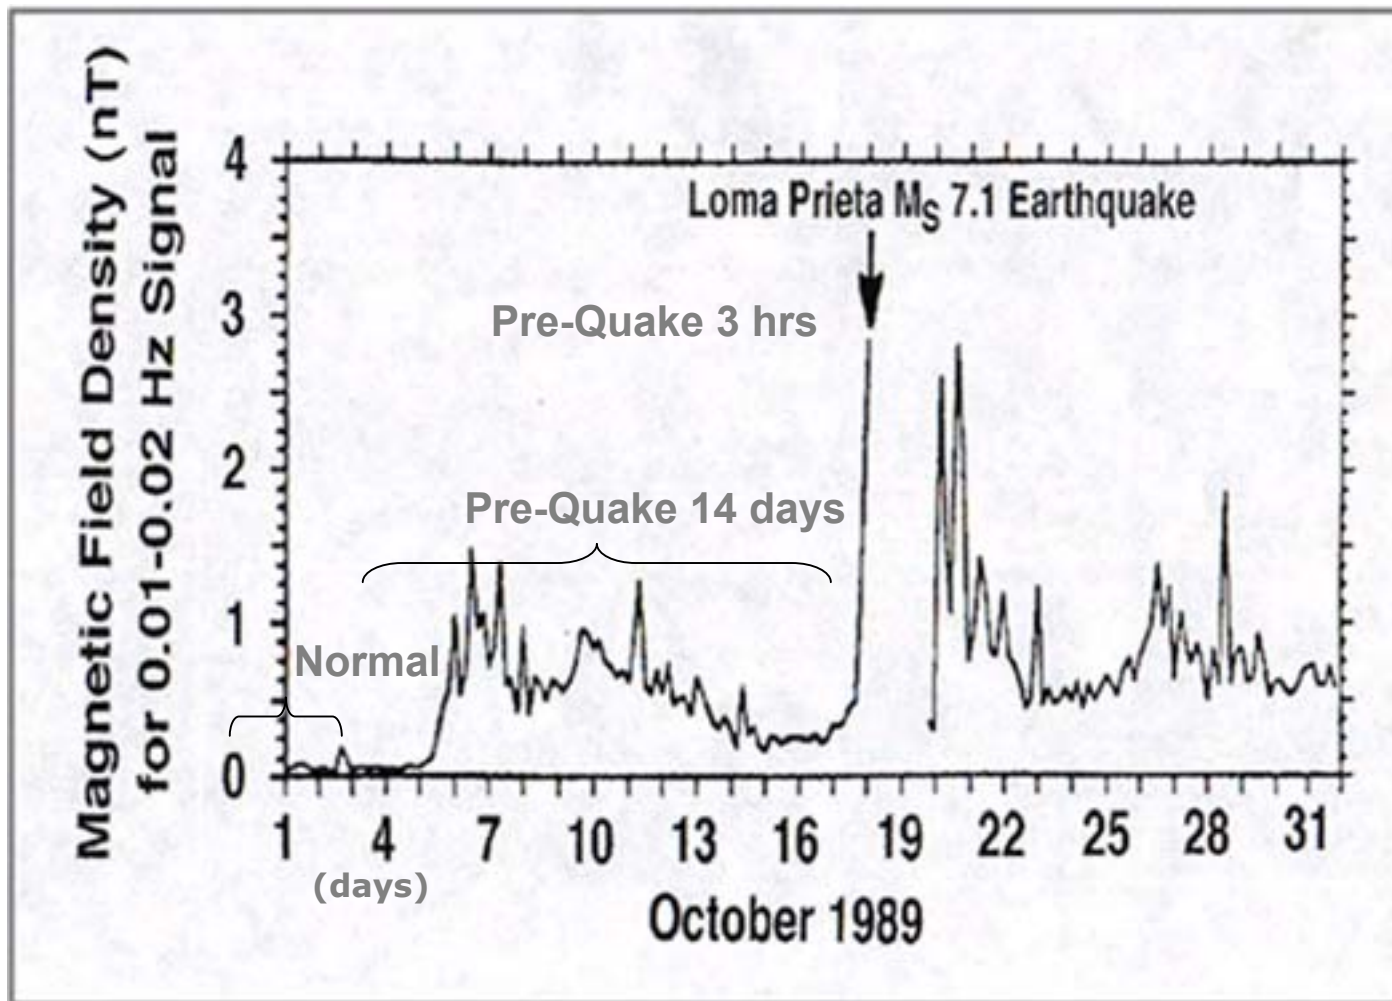

QuakeFinder Approach - Ground

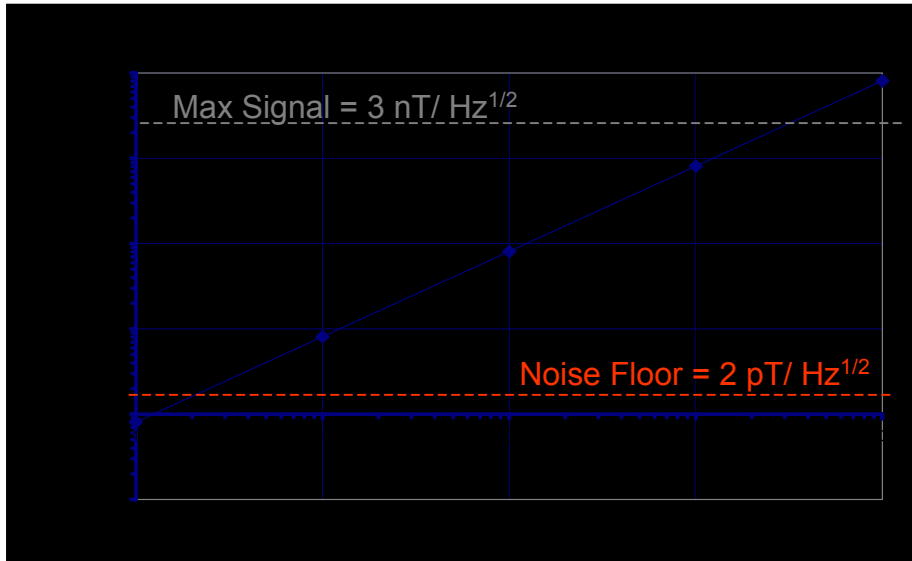

Frequency = 0.05 to 4 Hz

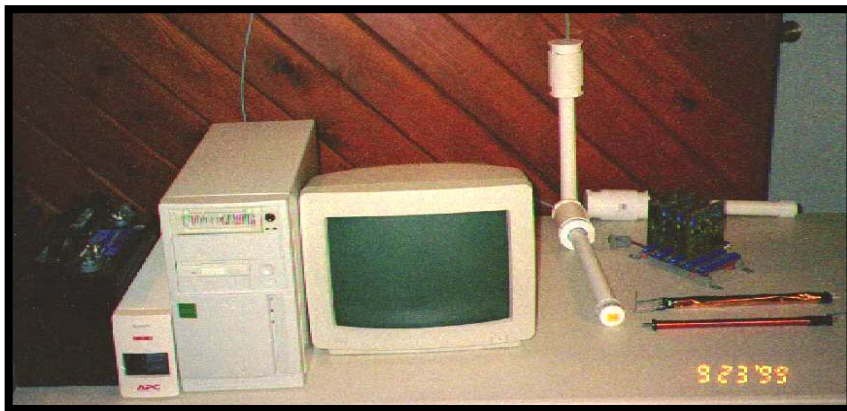


High School Instrument (25/50)




QF1000
Ground Instrument

QuakeFinder Network of Ground Sensors (Schools)


www.EarthquakeTracker.com

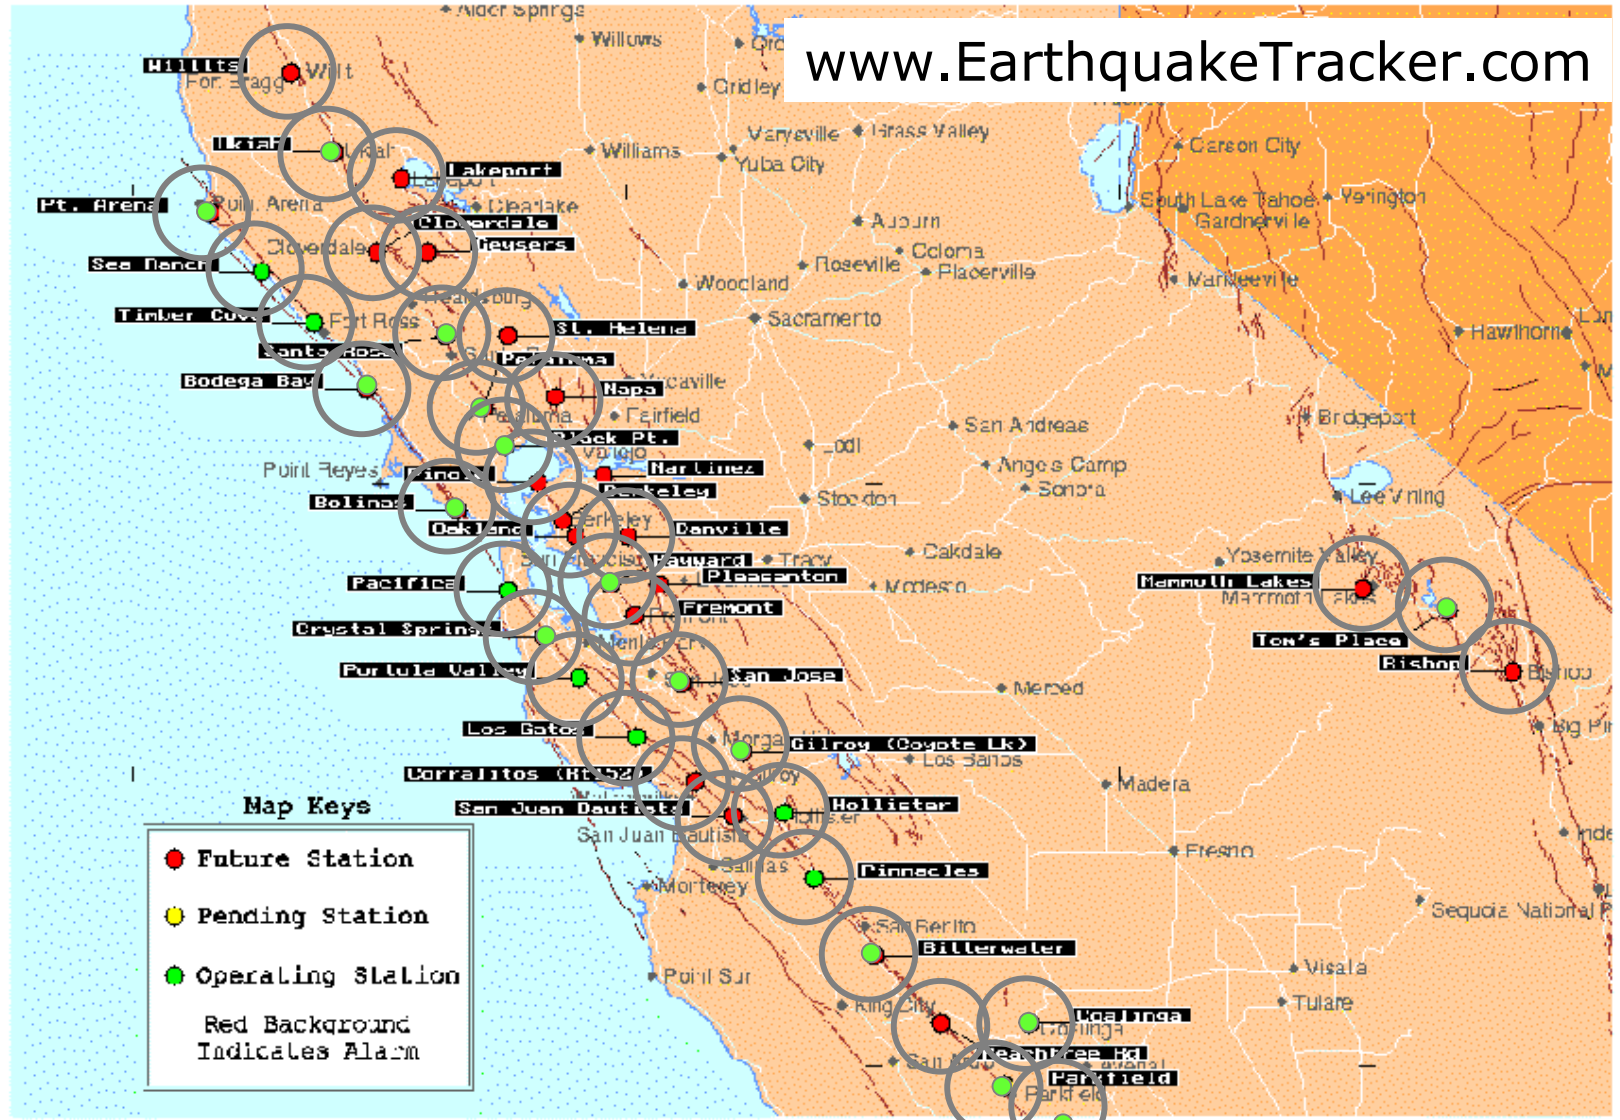


QuakeSat Operations

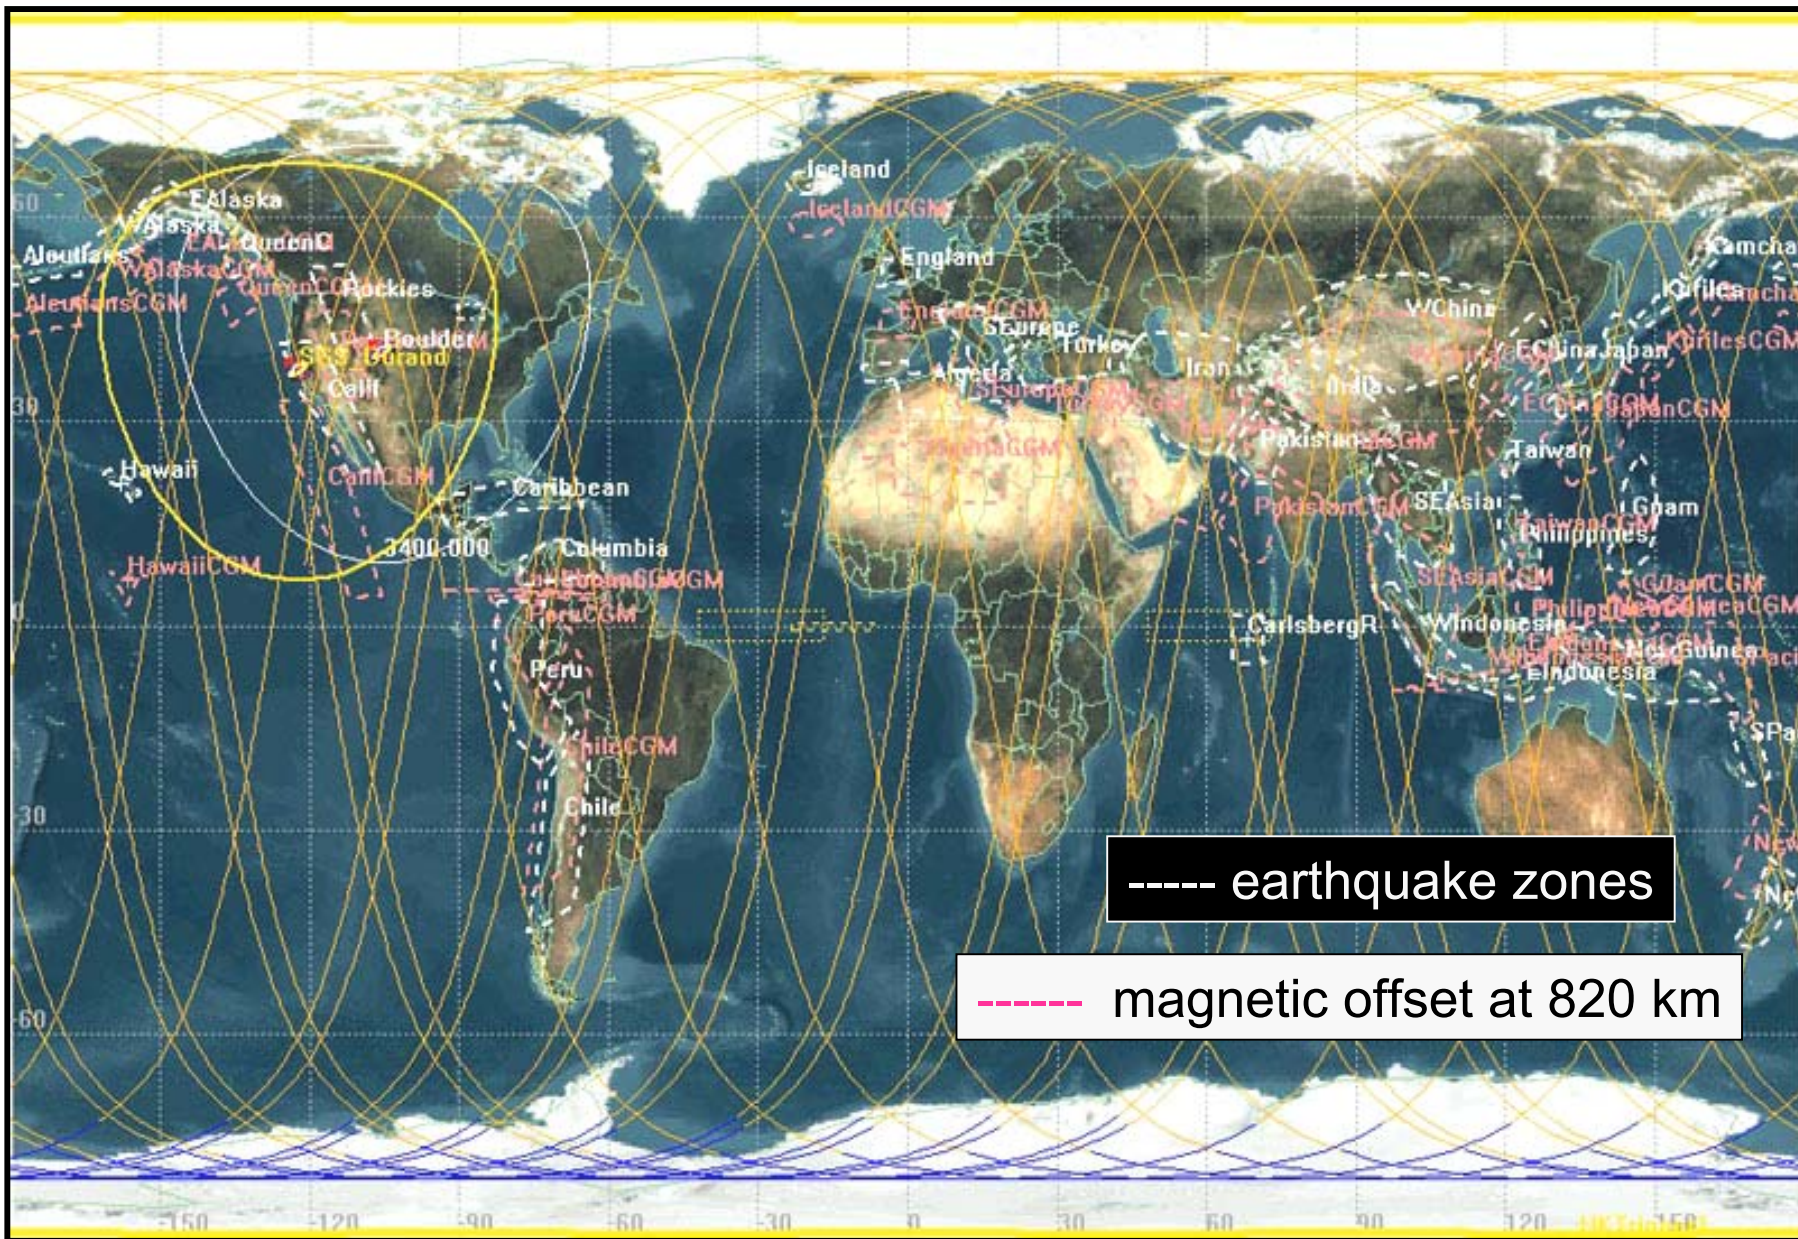


Averaged over 0.2 sec : MG2HXSsanSim1M24Dec1410B.raw (Time: 12/24/2003 14:10:04.00 UTC, Span = 0.100 - 140.120 sec)
 [history: Squared, DC Removed]

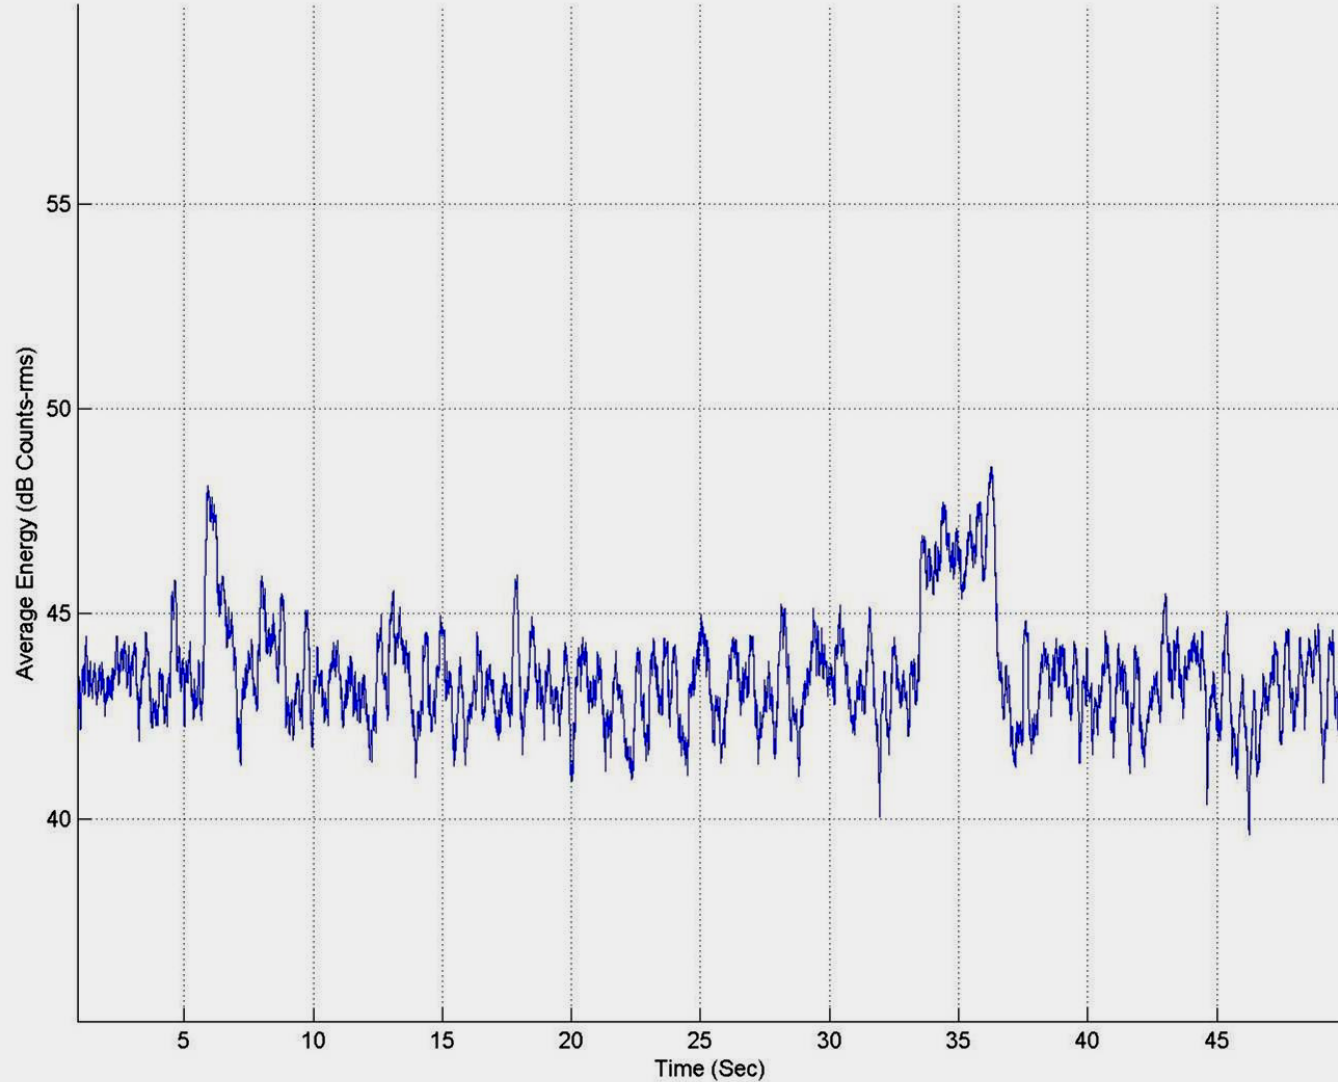

Frequency vs. Time Data : MG2HXSsanSim1M24Dec1410B.raw (Time: 12/24/2003 14:10:04.00 UTC, Span = 0.256 - 139.954 sec)

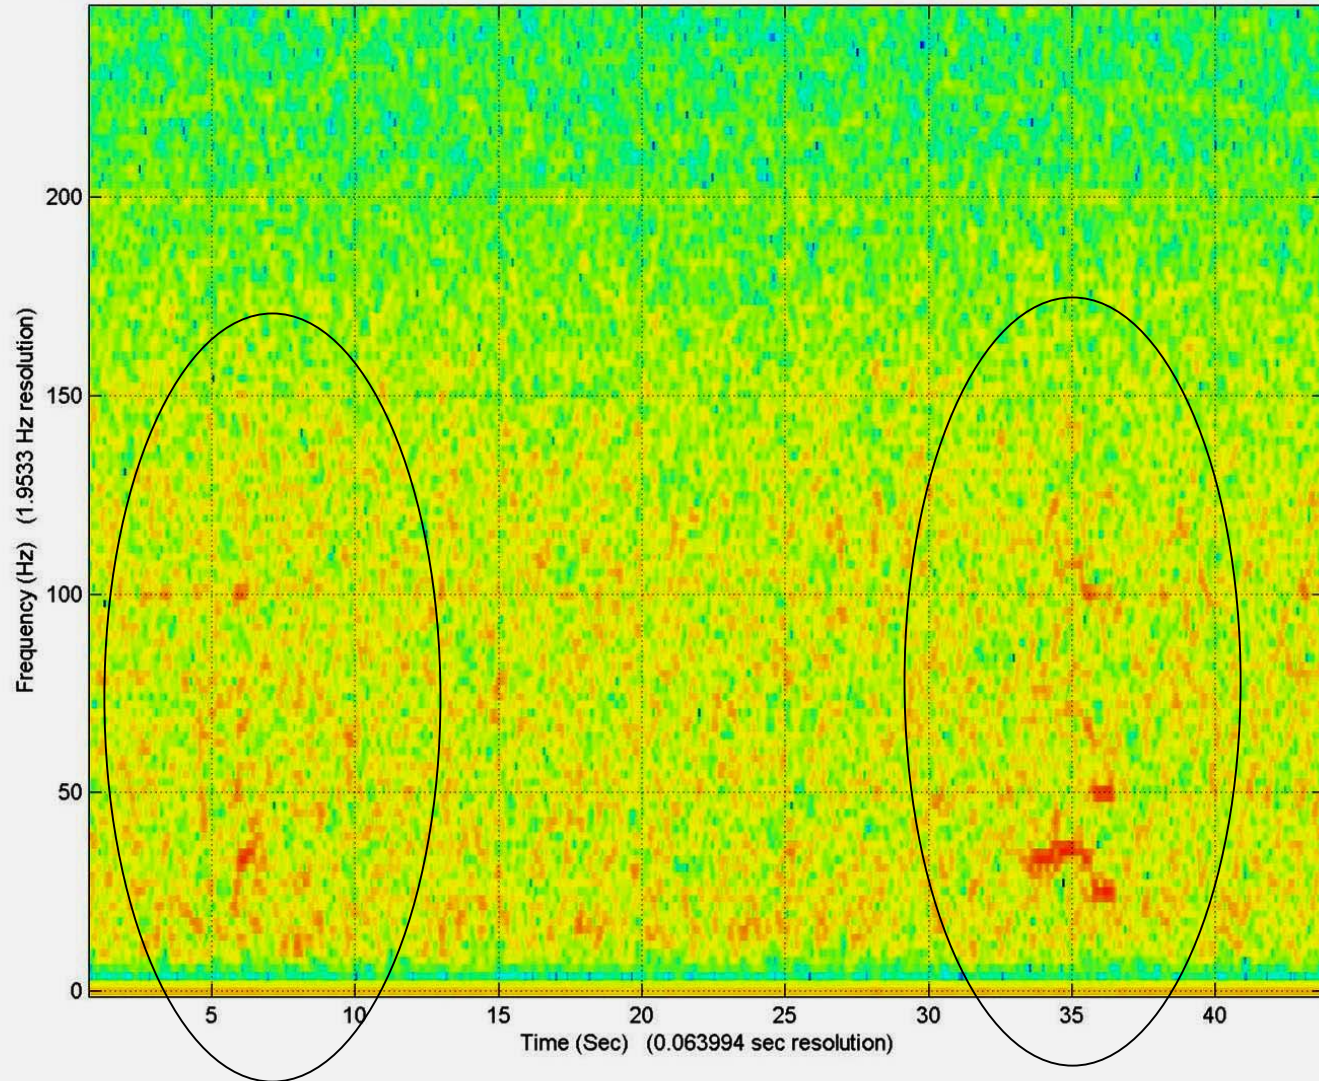

Xin China 11 Dec 2003

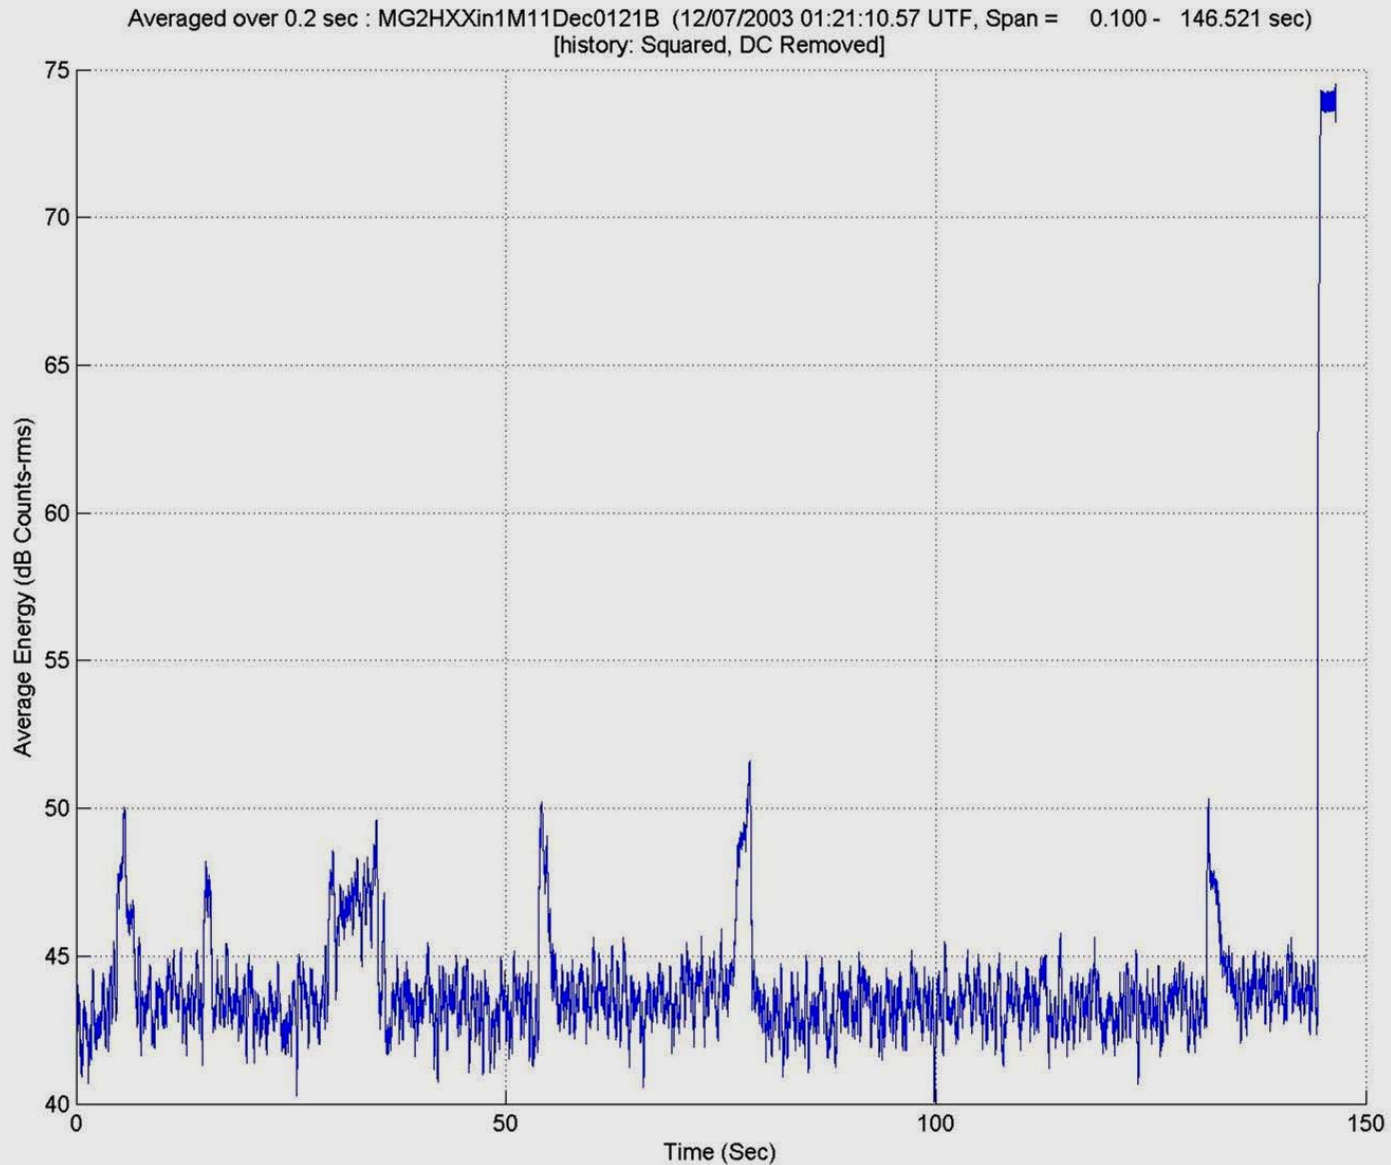

Xin China 11 Dec 2003

Frequency vs. Time Data : MG2HXXin1M11Dec0121B (12/07/2003 01:21:10.57 UTF, Span = 0.256 - 146.353 sec)

